

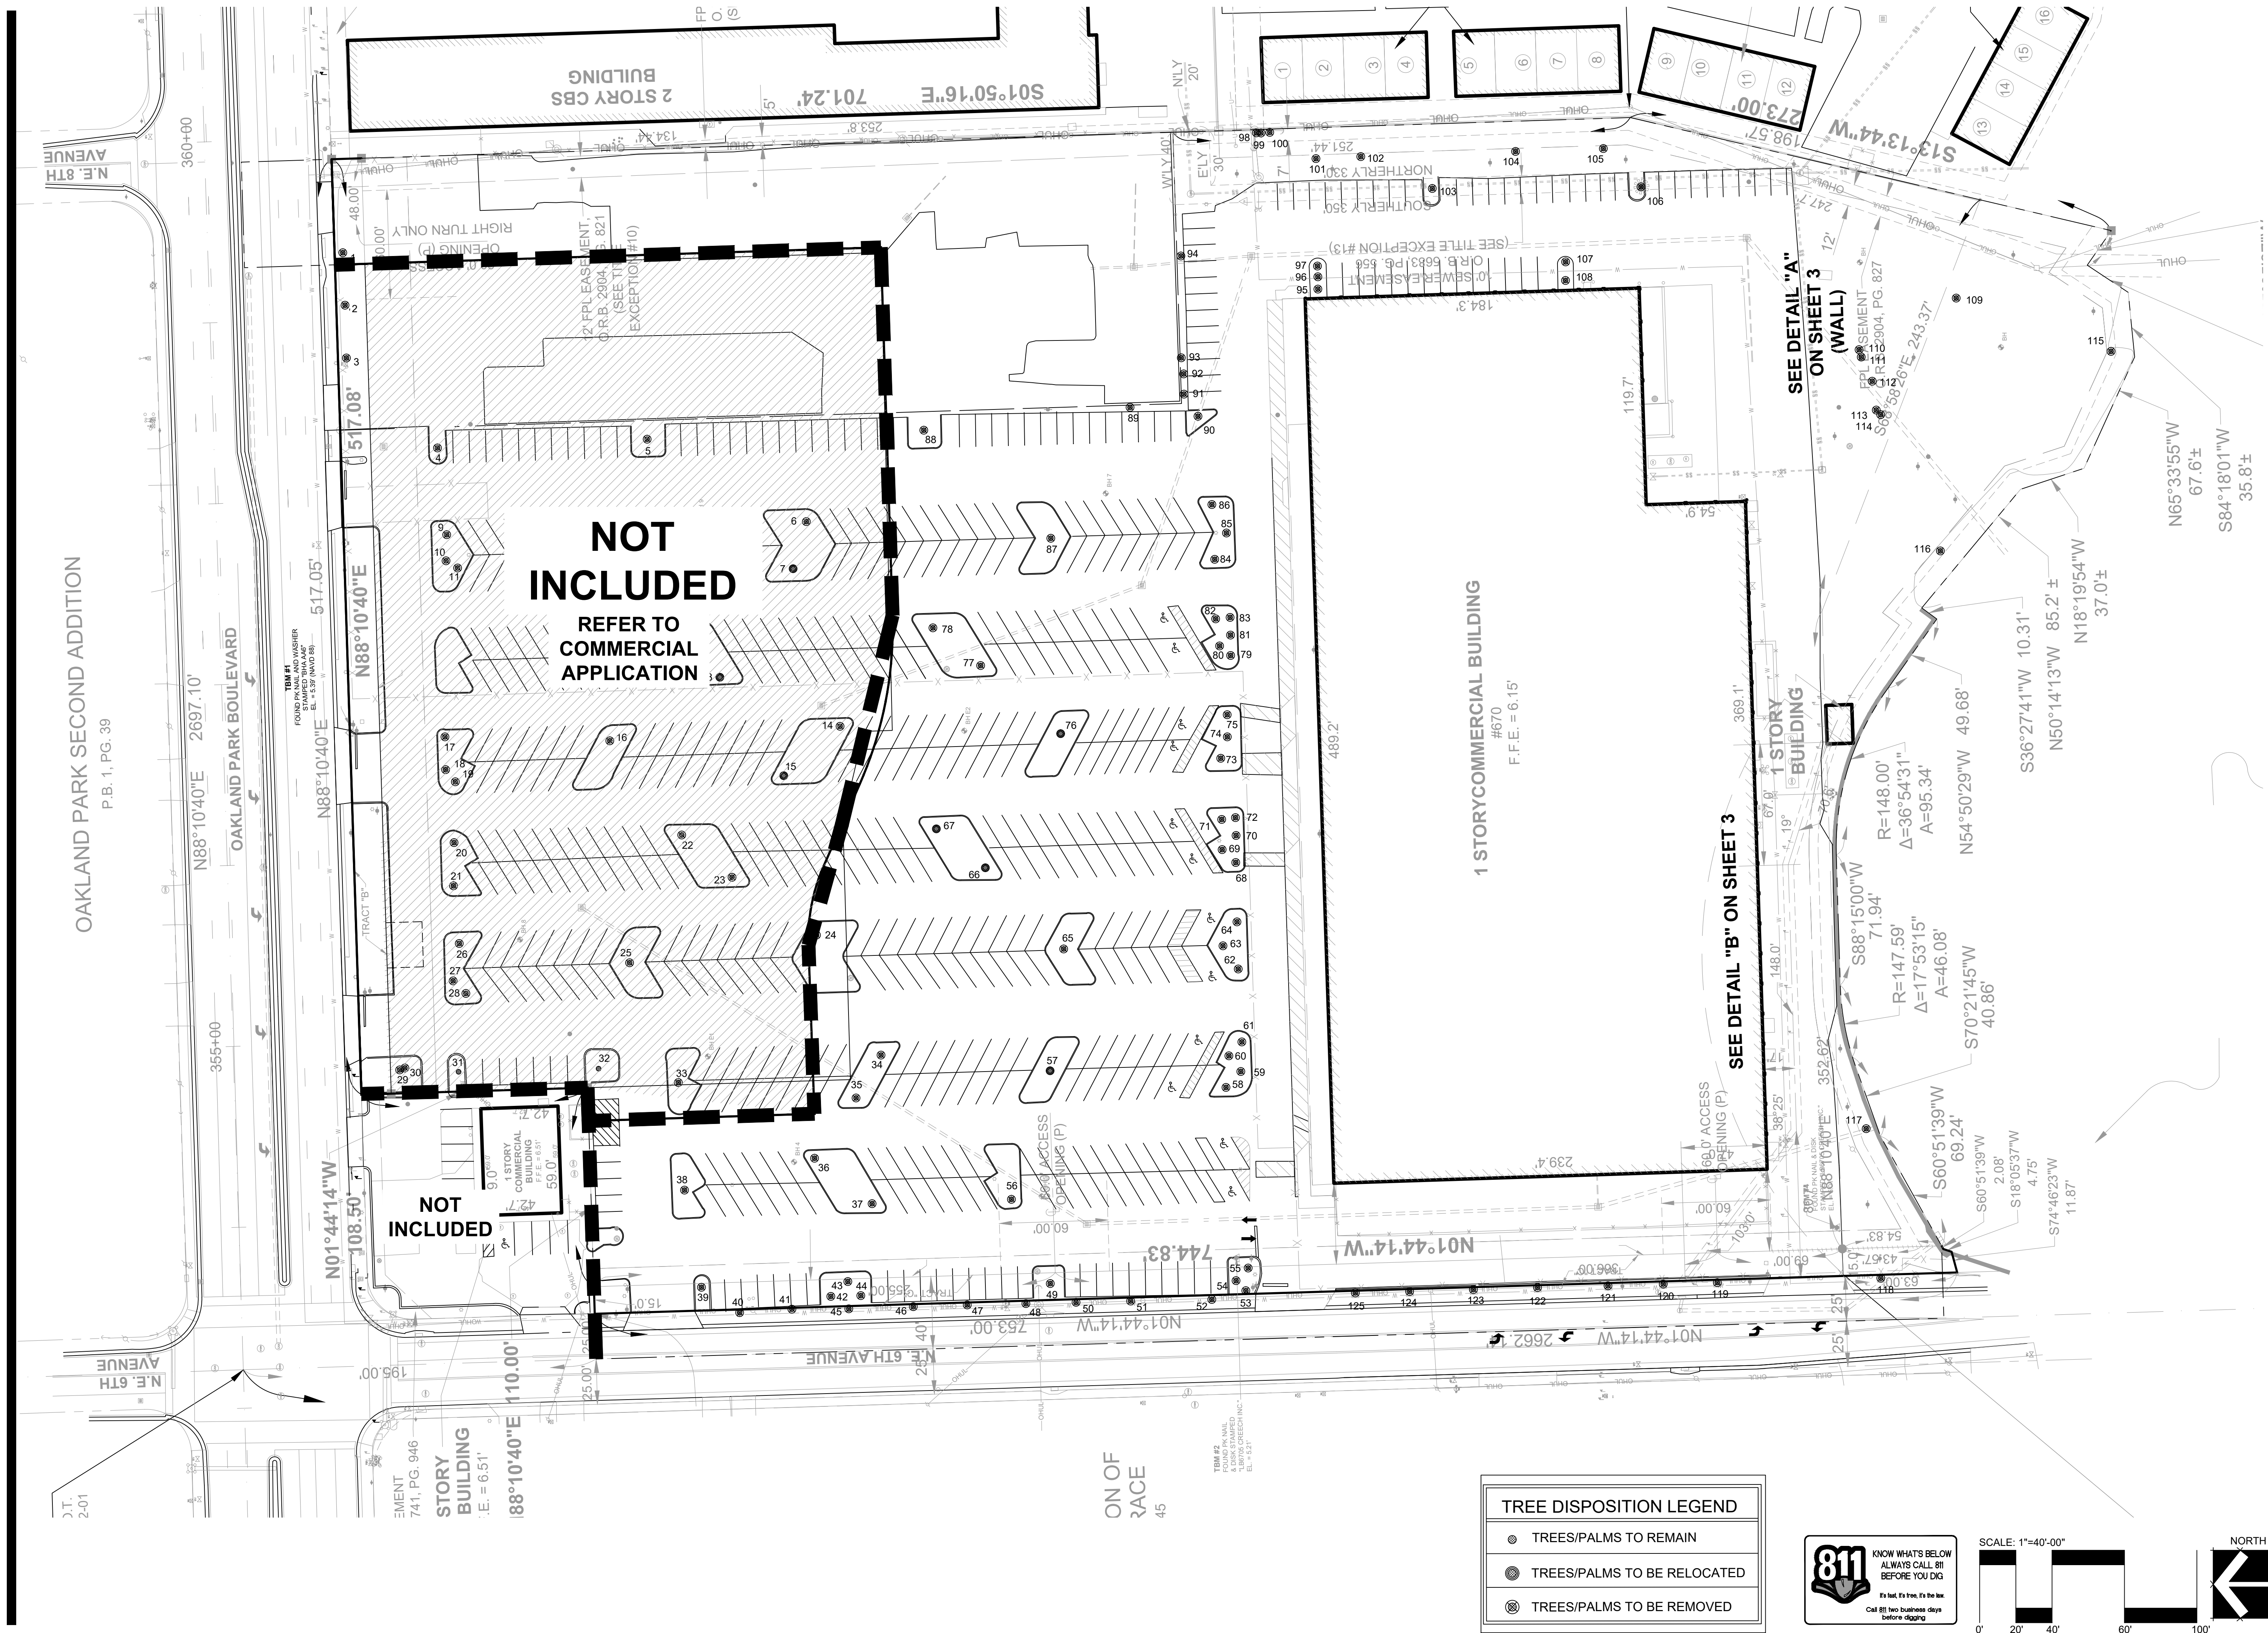




TREE DISPOSITION LEGEND	
	TREES/PALMS TO REMAIN
	TREES/PALMS TO BE RELOCATED
	TREES/PALMS TO BE REMOVED

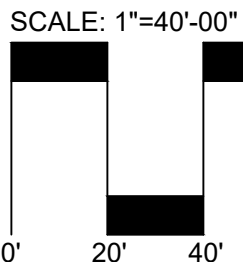

Architectural Alliance Landscape
612 SW 4th Ave., Fort Lauderdale, FL 33315 LCC000237
TEL: 954.774.9858 EMAIL: AJohnson@aall.net

1 DRC Resubmittal Set
06-14-2020
2 DRC Resubmittal Set
06-18-2020


Revision Dates

DRC SUBMITTAL SET

RAM OAKLAND PARK


RESIDENTIAL
670 E. Oakland Park Blvd., Oakland Park, FL

Sheet Description
OVERALL TREE DISPOSITION PLAN
Release Date
12-06-2019
Project Number
1912B
Drawing Number
L-200
Sheet 1 of 2

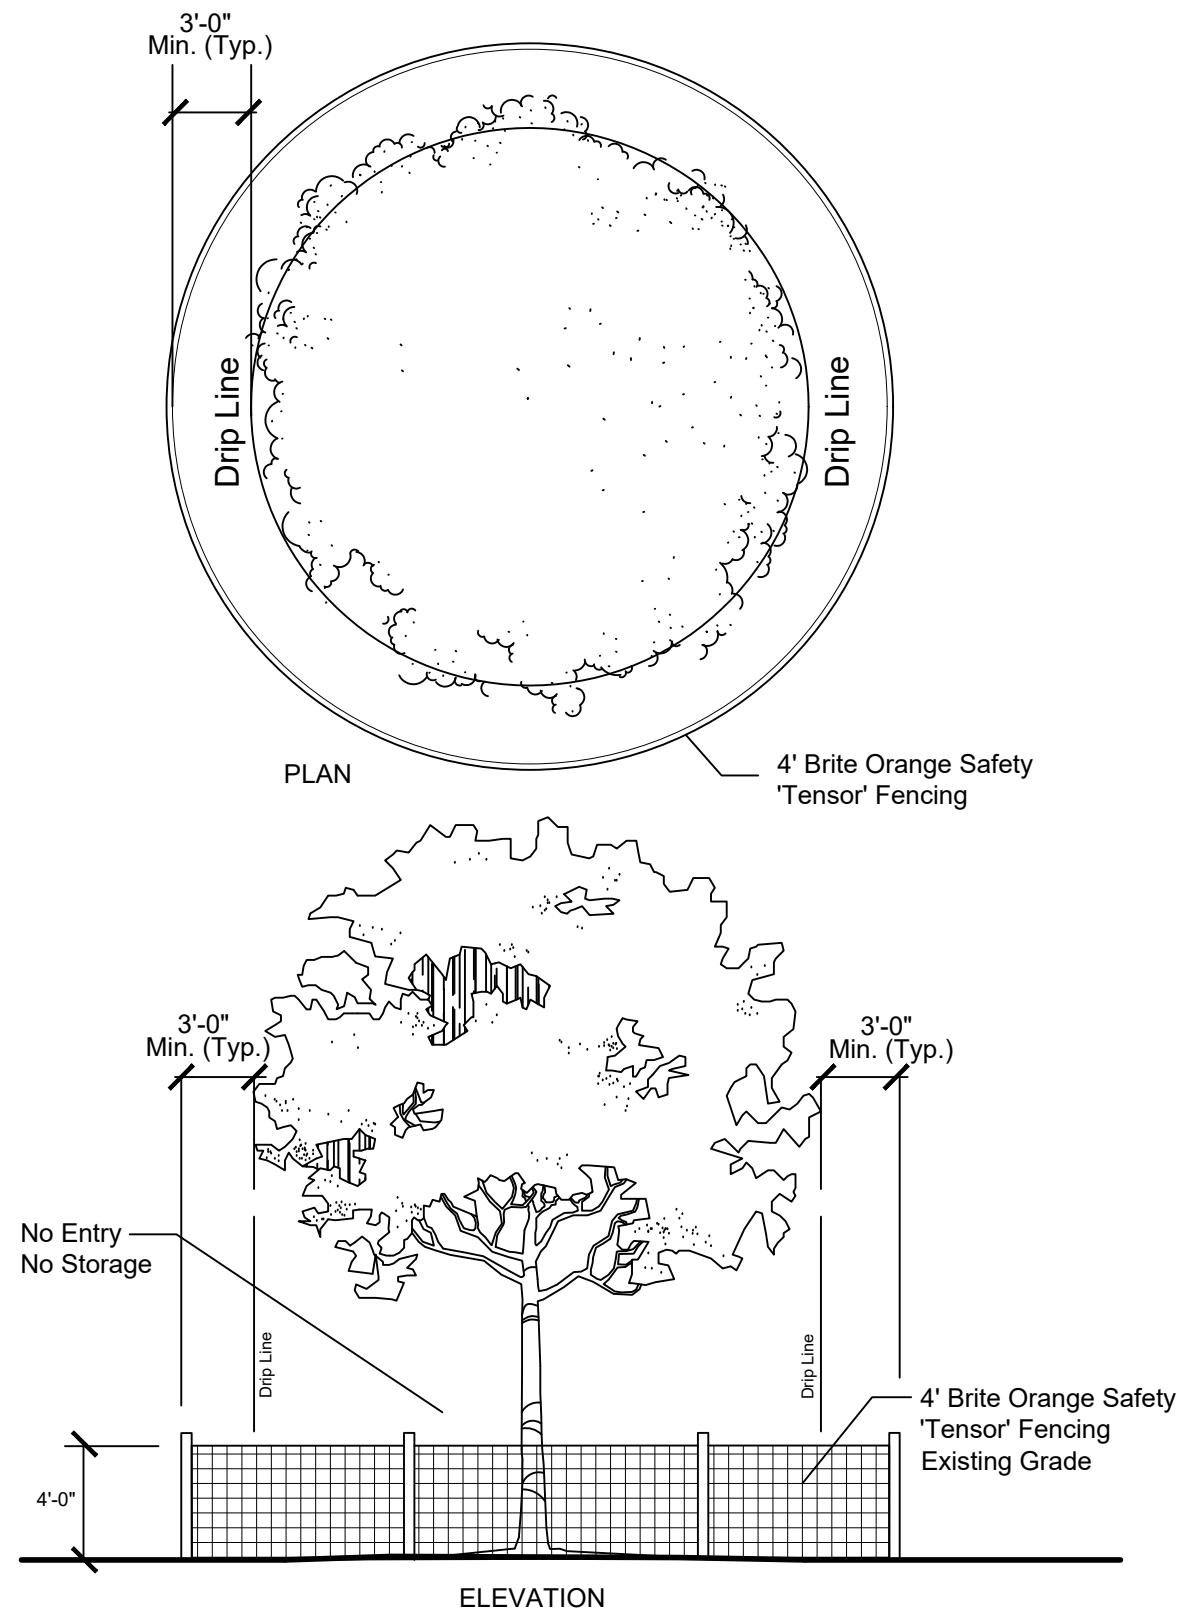

Existing Tree(s) Protection Detail

NTS

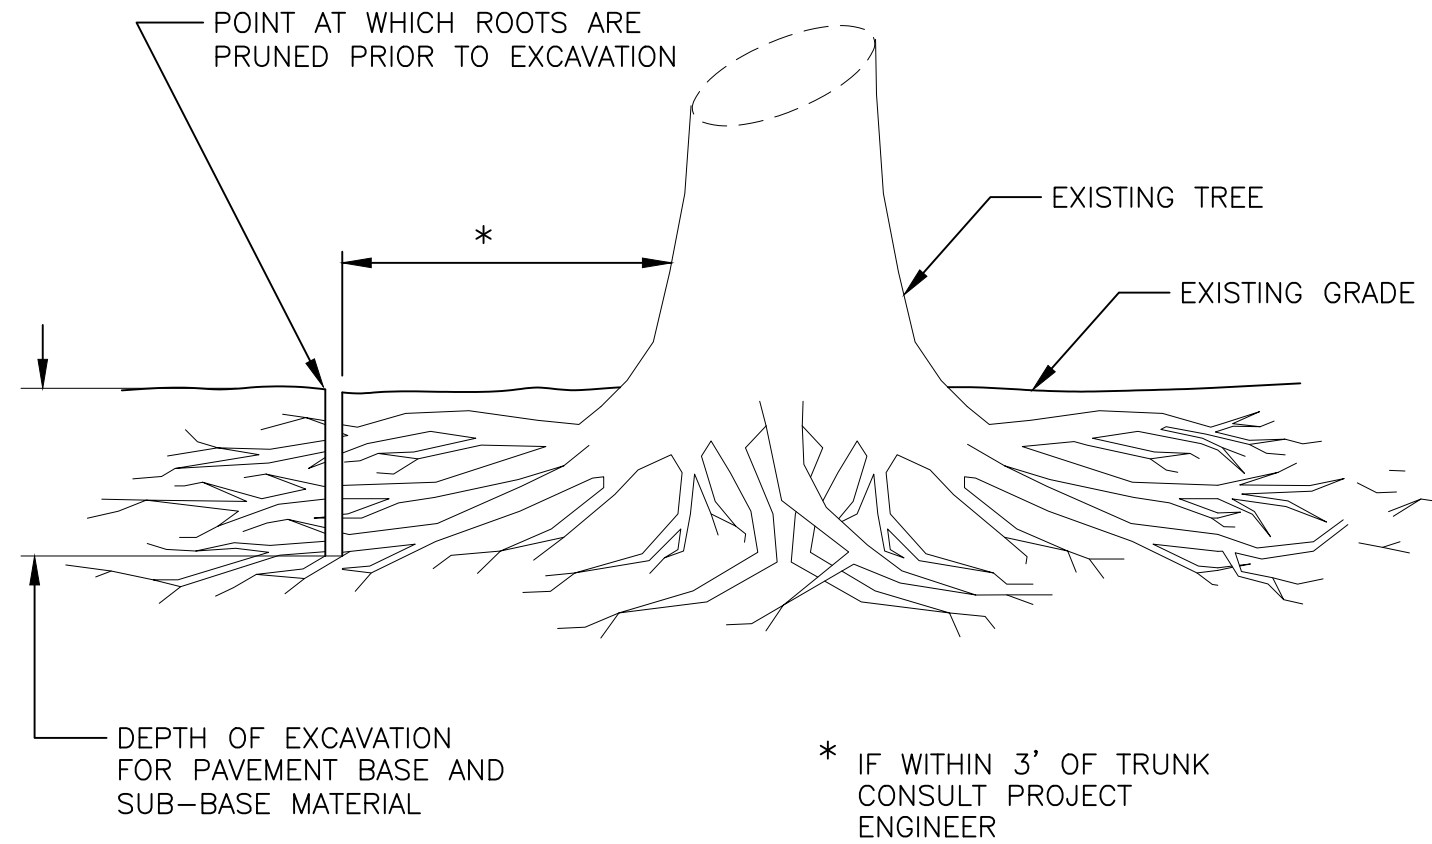

NOTES:

Prior to any excavating into the existing soil grade within 25 feet of the limit of the tree and plant protection area or trees to remain, root prune all existing trees to a depth of 24 inches below existing grade in alignments following the edges of the tree and plant protection area or as directed by the owner's representative. Root pruning shall be in conformance with ANSI A300 (part 8) latest edition.

- Using a row saw, chain trencher or similar trenching device, make a vertical cut within 2 feet of the limit of grading.
- After completion of cut, make clean cuts with a lopper, saw or pruner to remove all torn root ends on the tree side of the excavation, and backfill the trench immediately with good rooting medium, filling all voids. Fertilize with organic fertilizer to promote root growth.

Root Pruning Detail

NTS

Existing Tree Survey 11/22/19, Rev. 5/13/20										
RAM - OAKLAND PARK RETAIL AND MF										
KEY	BOTANICAL NAME	COMMON NAME	DBH (INCHES)	HEIGHT (FEET)	CANOPY (FEET)	CANOPY LOSS (SF)	NATIVE CANOPY LOSS	CONDITION (%)	DISPOSITION	COMMENT
RESIDENTIAL - MULTI-FAMILY										
24	<i>Lysiloma latisiliquum</i>	Wild Tamarind	11	24	26	530.6	530.6	50%	Remove	
34	<i>Lysiloma latisiliquum</i>	Wild Tamarind	8	22	24	452	452	50%	Remove	
35	<i>Lysiloma latisiliquum</i>	Wild Tamarind	11	24	28	615.4	615.4	50%	Remove	
36	<i>Lysiloma latisiliquum</i>	Wild Tamarind	13	24	28	615.4	615.4	60%	Remove	
37	<i>Lysiloma latisiliquum</i>	Wild Tamarind	12	24	28	615.4	615.4	55%	Remove	
38	<i>Conocarpus erectus Sericeus</i>	Silver Buttonwood	8		12	113	113	35%	Remove	
39	<i>Quercus virginiana</i>	Live Oak	16	24	28	615.4	615.4	50%	Remove	
40	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
41	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
42	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
43	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
44	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
45	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
46	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
47	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
48	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
49	<i>Quercus virginiana</i>	Live Oak	15	24	28	615.4	615.4	50%	Remove	
50	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
51	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
52	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
53	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
54	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
55	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
56	<i>Lysiloma latisiliquum</i>	Wild Tamarind	13	24	28	615.4	615.4	55%	Remove	
57	<i>Quercus virginiana</i>	Live Oak	18	26	32	0	0	65%	Relocate	
58	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
59	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
60	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
61	<i>Quercus virginiana</i>	Live Oak	13	24	30	706.5	706.5	60%	Remove	
62	<i>Bauhinia × blakeana</i>	Hong Kong Orchid	11	18	12	113	0	10%	Remove	
63	<i>Bauhinia × blakeana</i>	Hong Kong Orchid	0	0	0	0	0	0%	Remove	Dead
64	<i>Bauhinia × blakeana</i>	Hong Kong Orchid	7	18	12	113	0	40%	Remove	
65	<i>Lysiloma latisiliquum</i>	Wild Tamarind	14	24	28	615.4	615.4	40%	Remove	
66	<i>Quercus virginiana</i>	Live Oak	20	28	34	0	0	65%	Relocate	
67	<i>Quercus virginiana</i>	Live Oak	21	30	34	0	0	65%	Relocate	
68	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
69	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
70	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
71	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
72	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
73	<i>Bauhinia × blakeana</i>	Hong Kong Orchid	0	0	0	0	0	0%	Remove	Dead
74	<i>Bauhinia × blakeana</i>	Hong Kong Orchid	0	0	0	0	0	0%	Remove	Dead
75	<i>Bauhinia × blakeana</i>	Hong Kong Orchid	0	0	0	0	0	0%	Remove	Dead
76	<i>Quercus virginiana</i>	Live Oak	27	30	30	0	0	65%	Relocate	
77	<i>Quercus virginiana</i>	Live Oak	19	24	25	490.6	490.6	50%	Remove	
78	<i>Quercus virginiana</i>	Live Oak	18	24	25	490.6	490.6	60%	Remove	
79	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
80	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
81	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
82	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
83	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
84	<i>Bauhinia × blakeana</i>	Hong Kong Orchid	0	0	0	0	0	0%	Remove	Dead
85	<i>Bauhinia × blakeana</i>	Hong Kong Orchid	0	0	0	0	0	0%	Remove	Dead
86	<i>Bauhinia × blakeana</i>	Hong Kong Orchid	0	0	0	0	0	0%	Remove	Dead
87	<i>Lysiloma latisiliquum</i>	Wild Tamarind	25	25	30	706.5	706.5	50%	Remove	
88	<i>Lysiloma latisiliquum</i>	Wild Tamarind	8	18	20	314	314	50%	Remove	
89	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
90	<i>Swietenia mahagoni</i>	Mahogany	34	44	46	1661	1661	60%	Remove	
91	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
92	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
93	<i>Quercus virginiana</i>	Live Oak	4	12	8	50.2	50.2	10%	Remove	
94	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
95	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
96	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
97	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
98	<i>Sabal palmetto</i>	Cabbage Palm			8	50.2	50.2	30%	Remove	
99	<i>Sabal palmetto</i>	Cabbage Palm			8	50.2	50.2	30%	Remove	
100	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	40%	Remove	
101	<i>Quercus virginiana</i>	Live Oak	8	16	16	201	201	50%	Remove	
102	<i>Quercus virginiana</i>	Live Oak	6	16	16	201	201	50%	Remove	
103	<i>Quercus virginiana</i>	Live Oak	24	24	34	907.5	907.5	50%	Remove	
104	<i>Quercus virginiana</i>	Live Oak	7	14	16	201	201	50%	Remove	
105	<i>Quercus virginiana</i>	Live Oak	7	16	16	201	201	50%	Remove	
106	<i>Conocarpus erectus Sericeus</i>	Silver Buttonwood	4		10	78.5	78.5	20%	Remove	
107	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
108	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
109	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
110	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
111	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
112	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
113	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
114	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
115	<i>Ficus aurea</i>	Strangler Fig	30	28	26	530.7	0	20%	Remove	very poor, trunk rotted
116	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
117	<i>Casuarina spp.</i>	Australian Pine	0	0	0	0	0	0%	Remove	Exotic
118	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
119	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
120	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
121	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
122	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
123	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
124	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
125	<i>Sabal palmetto</i>	Cabbage Palm			10	78.5	78.5	50%	Remove	
						16630.4	15873.7			

Total number of palms to be removed = 55
Total number of trees to be removed = 25
Total Canopy Loss (16630.4 x 1.5) = 24,945.6 SF
Total Native Canopy Loss = 15,343.1 SF
NOTE: All height and canopy numbers are in feet. Palm height is CT unless otherwise noted.



DRC SUBMITTAL SET
RAM OAKLAND PARK
RESIDENTIAL
670 E. Oakland Park Blvd., Oakland Park, FL

Sheet Description

TREE DISPOSITION PLAN

Release Date
12-06-2019

Project Number
1912B

Drawing Number
L-201

Sheet 2 of 2


- 1 DRC Resubmittal Set 06-14-2020
- 2 DRC Resubmittal Set 06-18-2020




AAL

Architectural Alliance Landscape



612 SW 4th Ave., Fort Lauderdale, FL 33315 LCC000237
TEL: 954-764-9836 EMAIL: hjohnson@aall.net

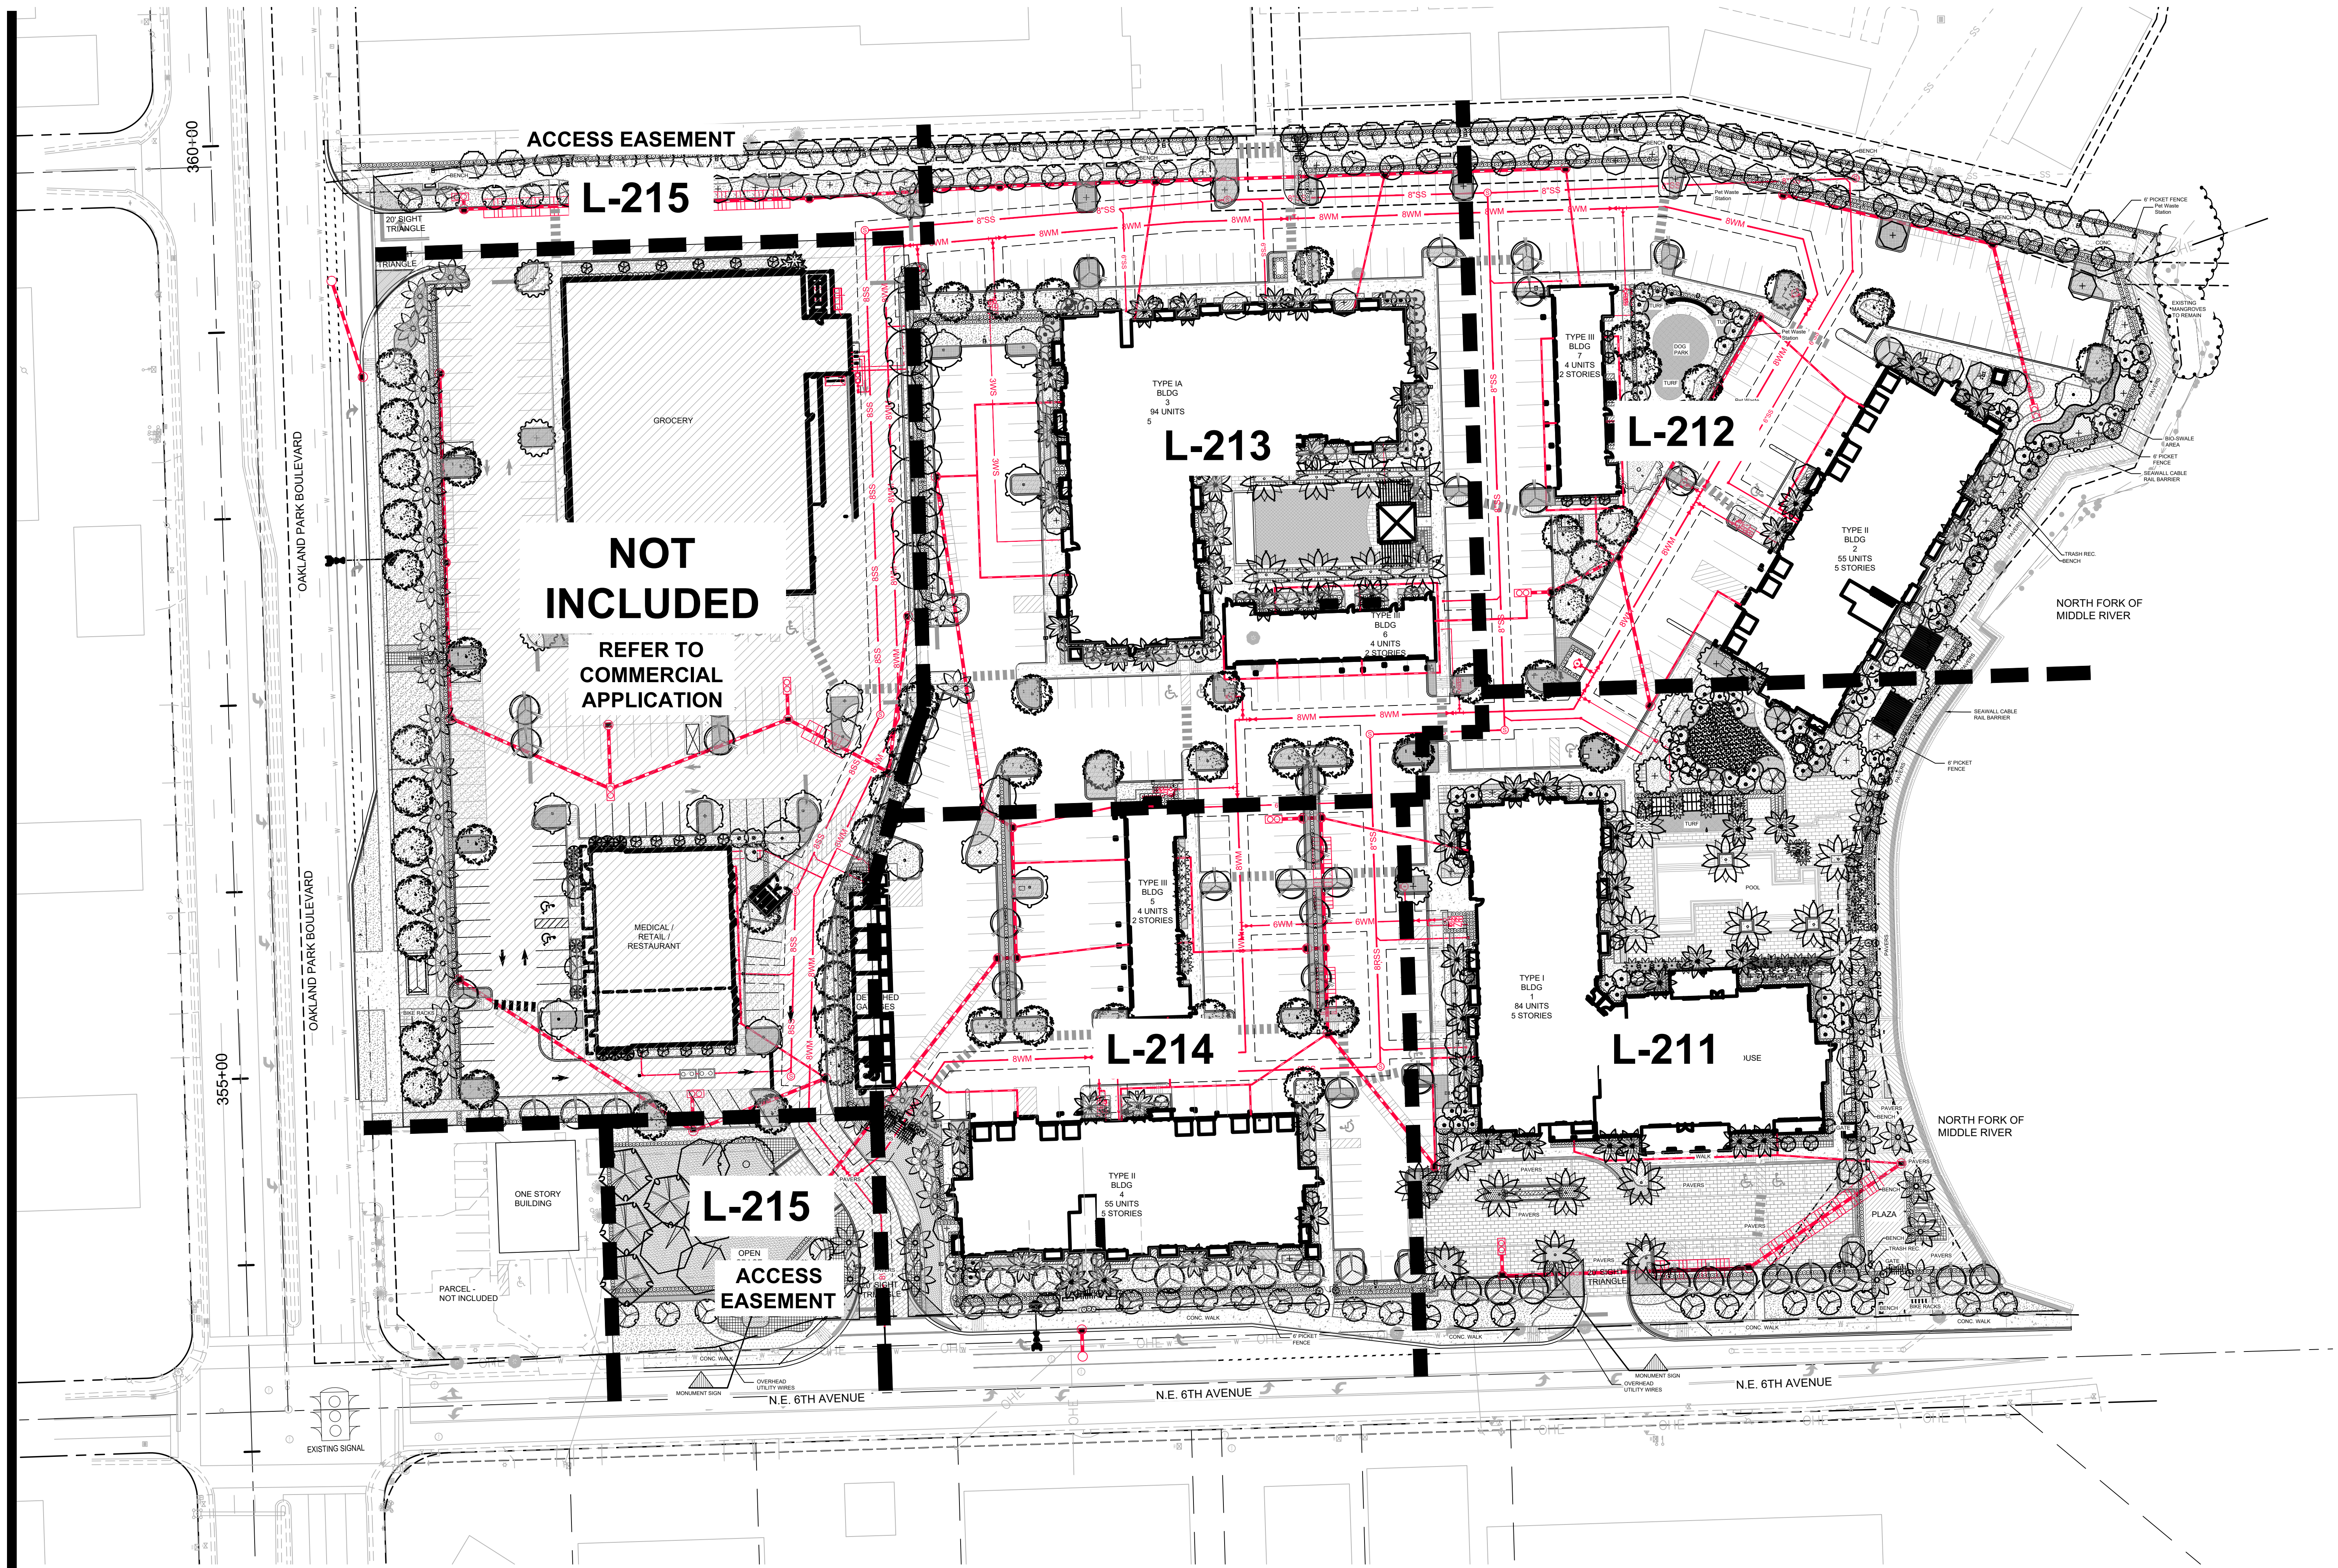

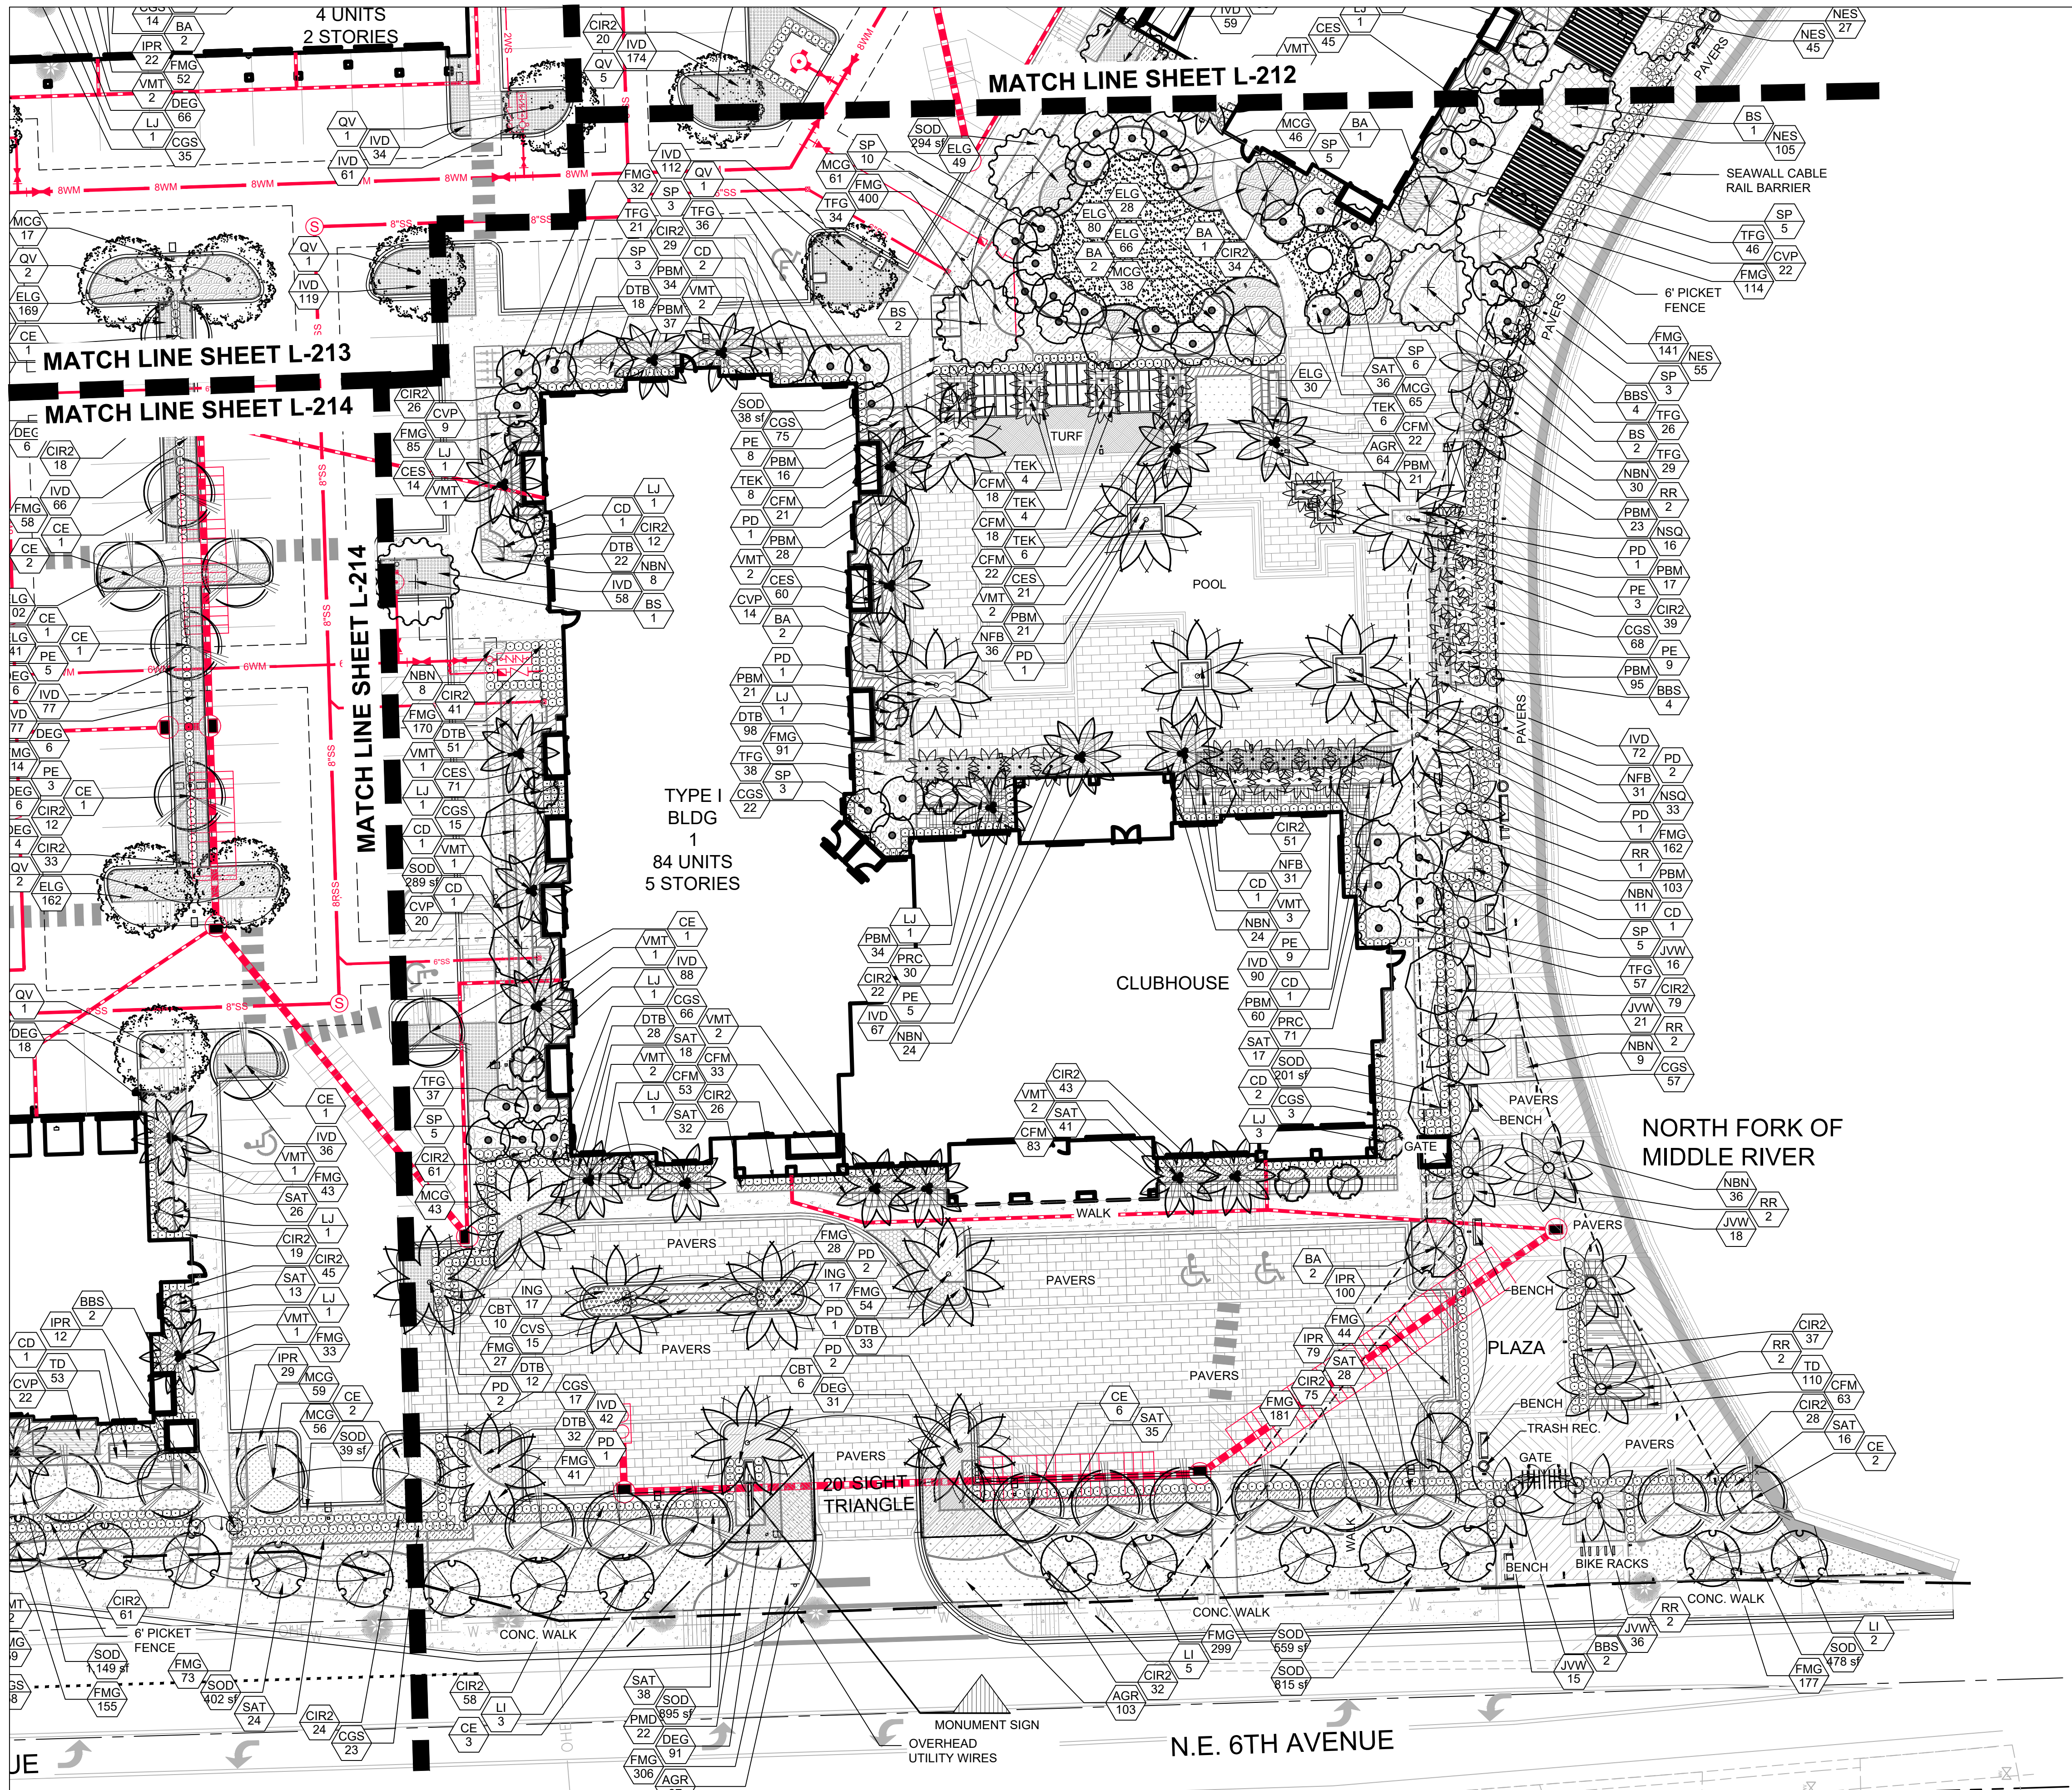


NOTES:

1. ALL SOD AND LANDSCAPE RECEIVE 100% COVERAGE FROM AN AUTOMATIC IRRIGATION SYSTEM USING AN APPROVED WATER SOURCE.
2. IRRIGATION SYSTEM SHALL ALSO BE EQUIPPED WITH RAIN SENSOR.
3. SEE SHEET L-210 - L-217 FOR PLANTING PLAN.
4. ALL PLANTED MATERIAL ADJACENT TO CURBING SHALL BE PLANTED 3' BACK OF SAID CURB.
5. A PRE-PLANTING MEETING SHALL BE SCHEDULED WITH THE CITY FORESTER OR LANDSCAPE INSPECTOR AND THE LANDSCAPE CONTRACTOR PRIOR TO ANY INSTALLATION ON THE SITE.
6. ALL SHADE AND MEDIUM TREES INSTALLED WITHIN 6' OF A PUBLIC INFRASTRUCTURE SHALL UTILIZE A ROOT BARRIER SYSTEM.
7. POLES AND TIES ARE TO BE REMOVED FROM TREE PRIOR TO PLANTING. TREES ARE TO BE ABLE TO STAND WITHOUT SUPPORT. THOSE THAT CANNOT STAND UPRIGHT ALONE WILL BE REJECTED.
8. THE USE OF CYPRESS MULCH IS DISCOURAGED AND ALL MULCH IS TO BE KEPT AT A MINIMUM OF 6" FROM BASE OF ALL PLANT MATERIAL.
9. THE USE OF SISAL STRAPPING/ROPE IS REQUIRED TO BE INCORPORATED AROUND THE TREE WHEN WELLINGTON TAPE IS USED TO STABILIZE THE PLANTING.

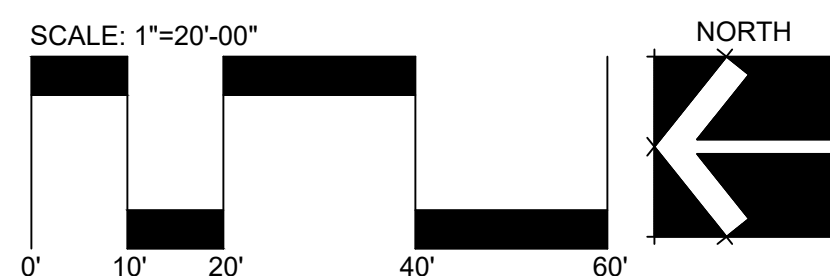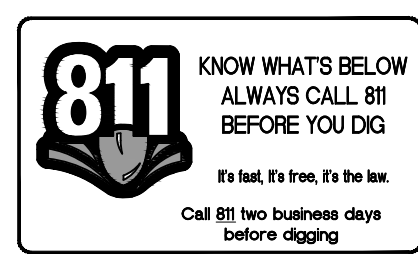

AAL
Architectural Alliance Landscape
612 SW 4th Ave., Fort Lauderdale, FL 33315 LCC000237
TEL: 954-764-9856 EMAIL: AJohnson@aall.net

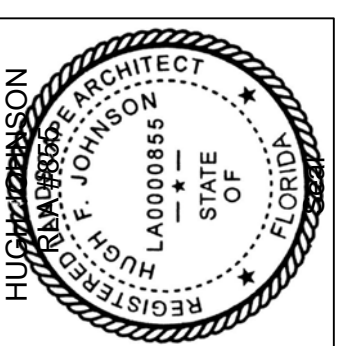


1	DRC Resubmittal Set	06-14-2020
2	DRC Resubmittal	06-18-2020

Revision Dates



DRC SUBMITTAL SET
RAM OAKLAND PARK
RESIDENTIAL
670 E. Oakland Park Blvd., Oakland Park, FL

Sheet Description	LANDSCAPE PLAN
Release Date	12-06-2019
Project Number	1912B
Drawing Number	L-211
Sheet 2 of 8	

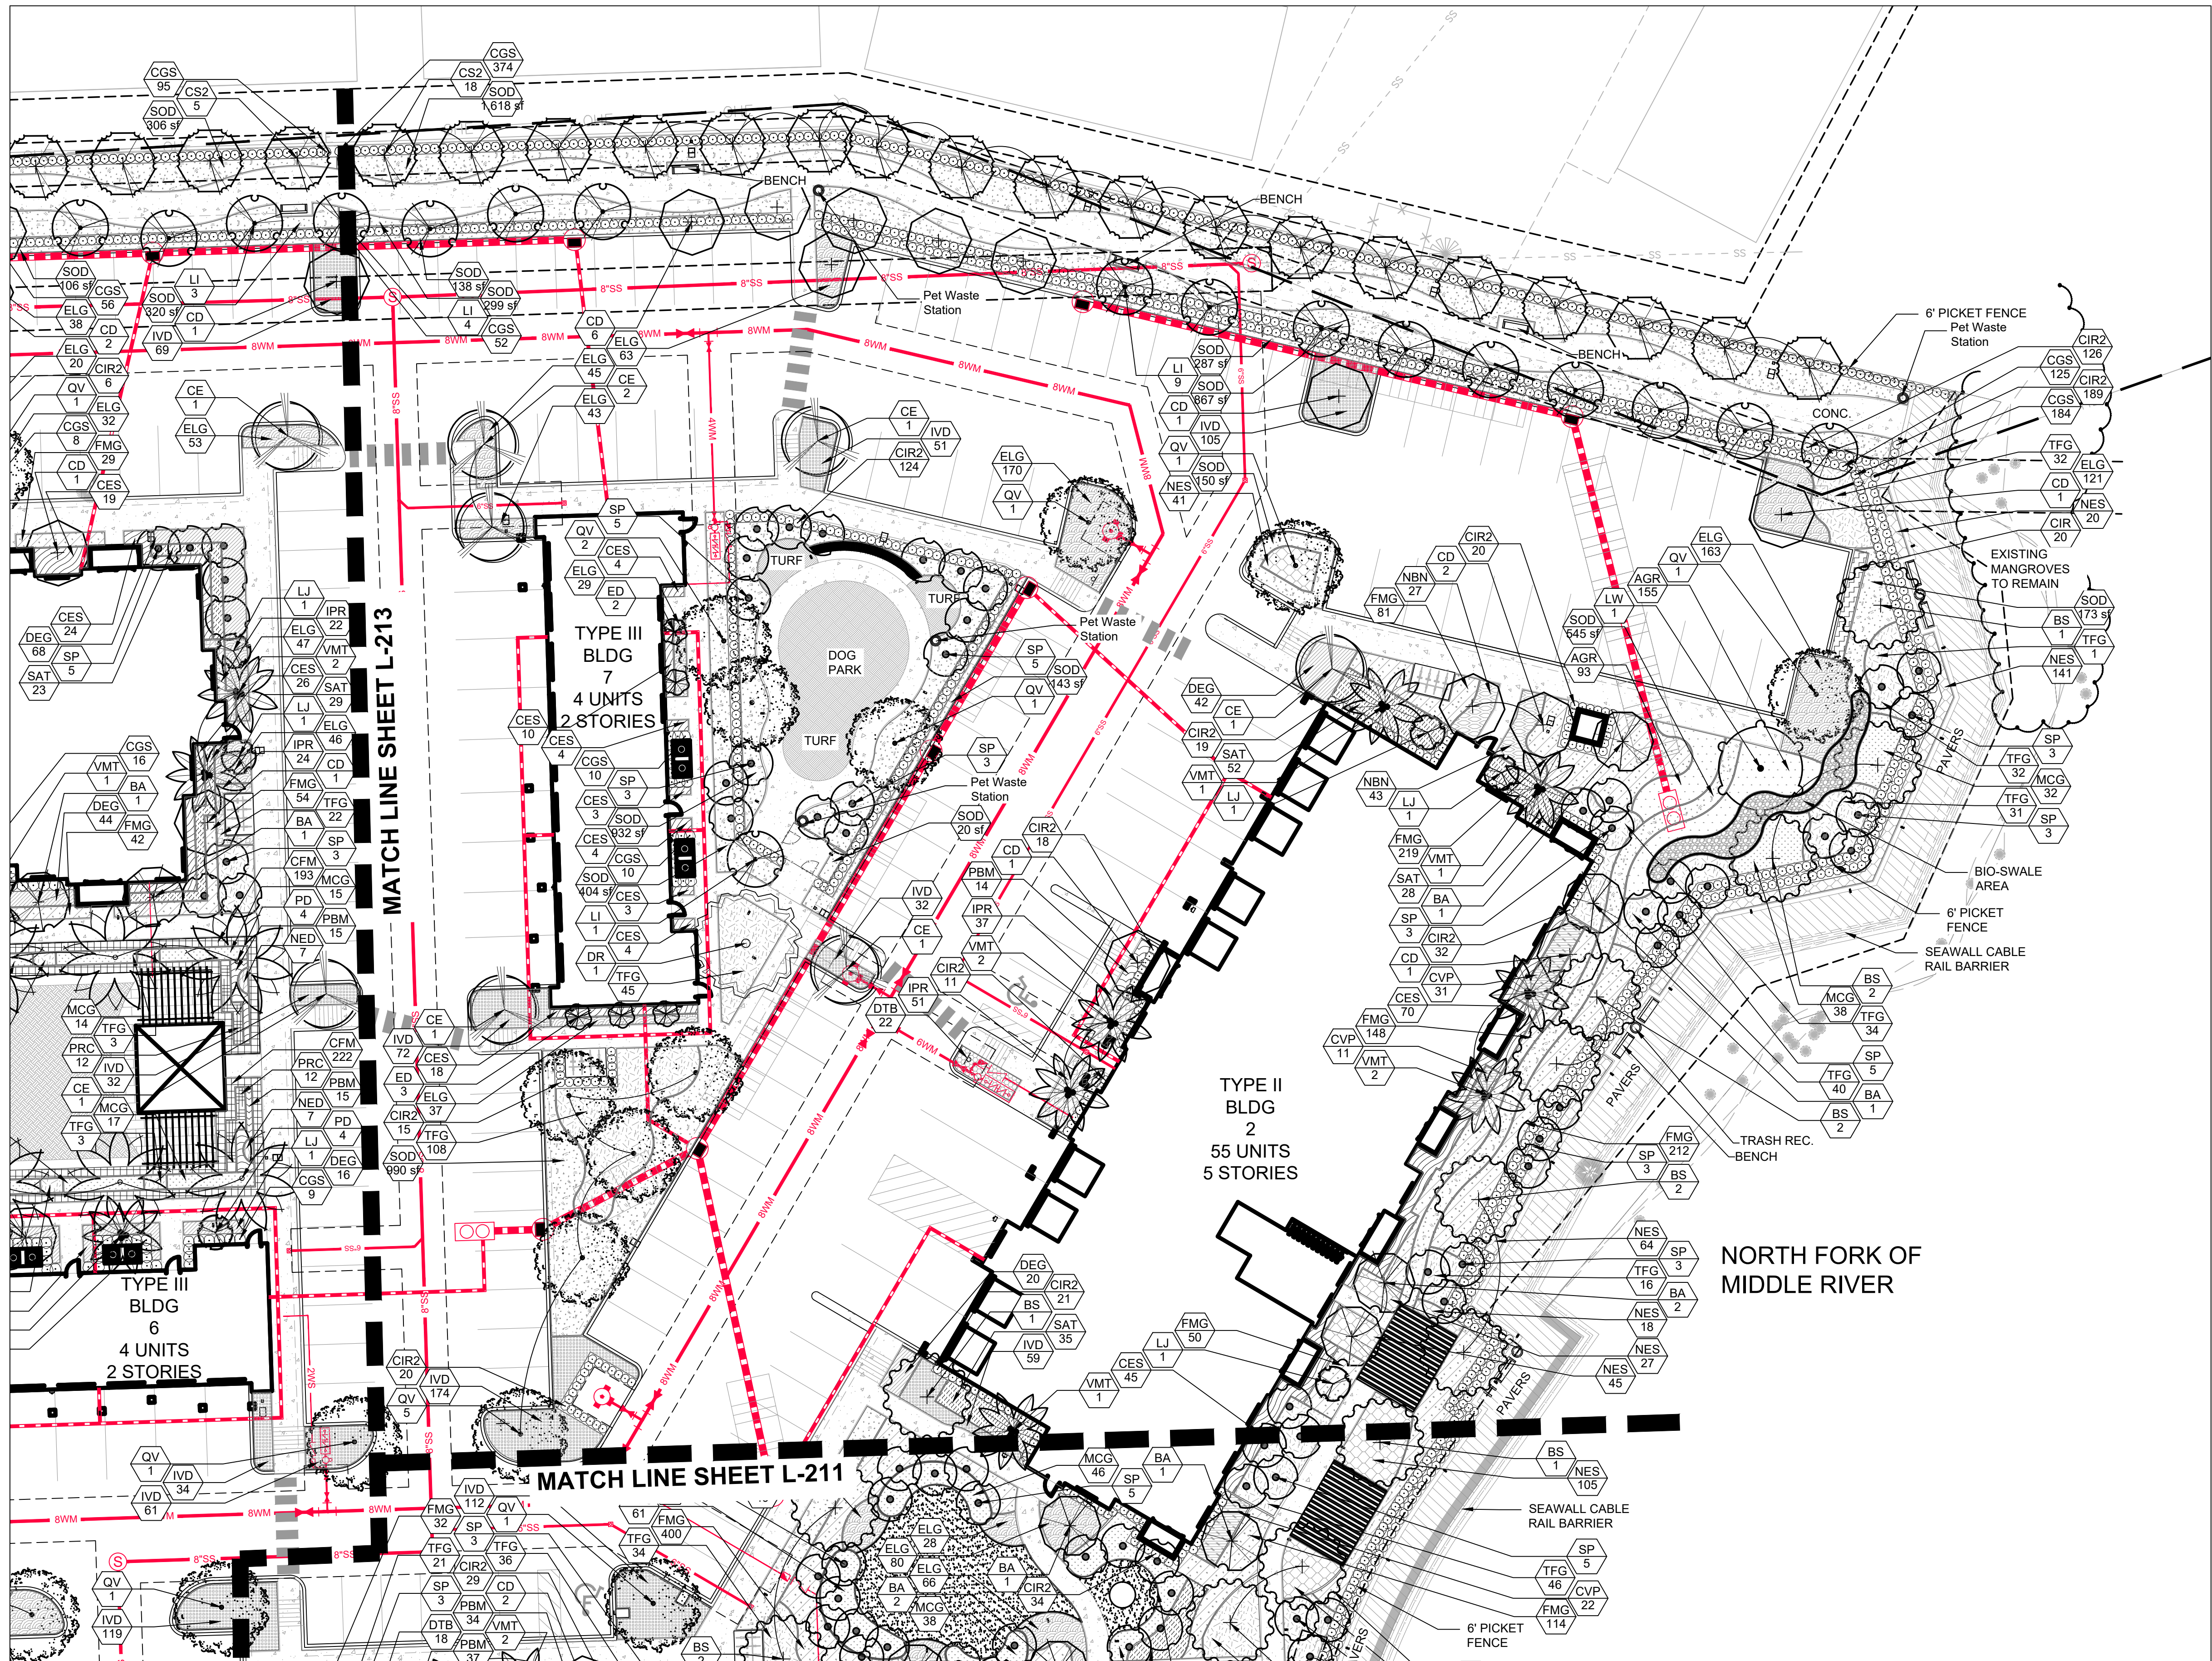

NOTES:

1. ALL SOD AND LANDSCAPE RECEIVE 100% COVERAGE FROM AN AUTOMATIC IRRIGATION SYSTEM USING AN APPROVED WATER SOURCE.
2. IRRIGATION SYSTEM SHALL ALSO BE EQUIPPED WITH RAIN SENSOR.
3. SEE SHEET L-210 - L-217 FOR PLANTING PLAN.
4. ALL PLANTED MATERIAL ADJACENT TO CURBING SHALL BE PLANTED 3' BACK OF SAID CURB.
5. A PRE-PLANTING MEETING SHALL BE SCHEDULED WITH THE CITY FORESTER OR LANDSCAPE INSPECTOR AND THE LANDSCAPE CONTRACTOR PRIOR TO ANY INSTALLATION ON THE SITE.
6. ALL SHADE AND MEDIUM TREES INSTALLED WITHIN 6' OF A PUBLIC INFRASTRUCTURE SHALL UTILIZE A ROOT BARRIER SYSTEM.
7. POLES AND TIES ARE TO BE REMOVED FROM TREE PRIOR TO PLANTING. TREES ARE TO BE ABLE TO STAND WITHOUT SUPPORT. THOSE THAT CANNOT STAND UPRIGHT ALONE WILL BE REJECTED.
8. THE USE OF CYPRESS MULCH IS DISCOURAGED AND ALL MULCH IS TO BE KEPT AT A MINIMUM OF 6" FROM BASE OF ALL PLANT MATERIAL.
9. THE USE OF SISAL STRAPPING/ROPE IS REQUIRED TO BE INCORPORATED AROUND THE TREE WHEN WELLINGTON TAPE IS USED TO STABILIZE THE PLANTING.

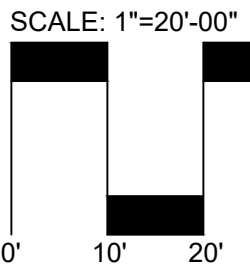

Sheet Description
LANDSCAPE
PLAN

Release Date
12-06-2019

Project Number
1912B

Drawing Number


L-212

Sheet 3 of 8

DRC SUBMITTAL SET

RAM OAKLAND PARK

RESIDENTIAL
670 E. Oakland Park Blvd., Oakland Park, FL

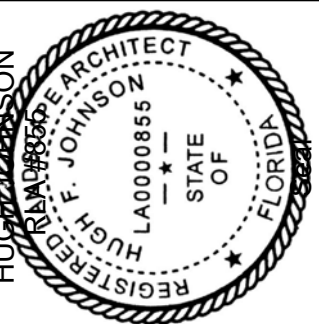


1 DRC Resubmittal Set
06-14-2020

2 DRC Resubmittal Set
06-18-2020



Revision Dates

AAL
Architectural Alliance Landscape
612 SW 4th Ave., Fort Lauderdale, FL 33315 LCC0000237
TEL: 954-774-9836 EMAIL: h.johnson@aall.net

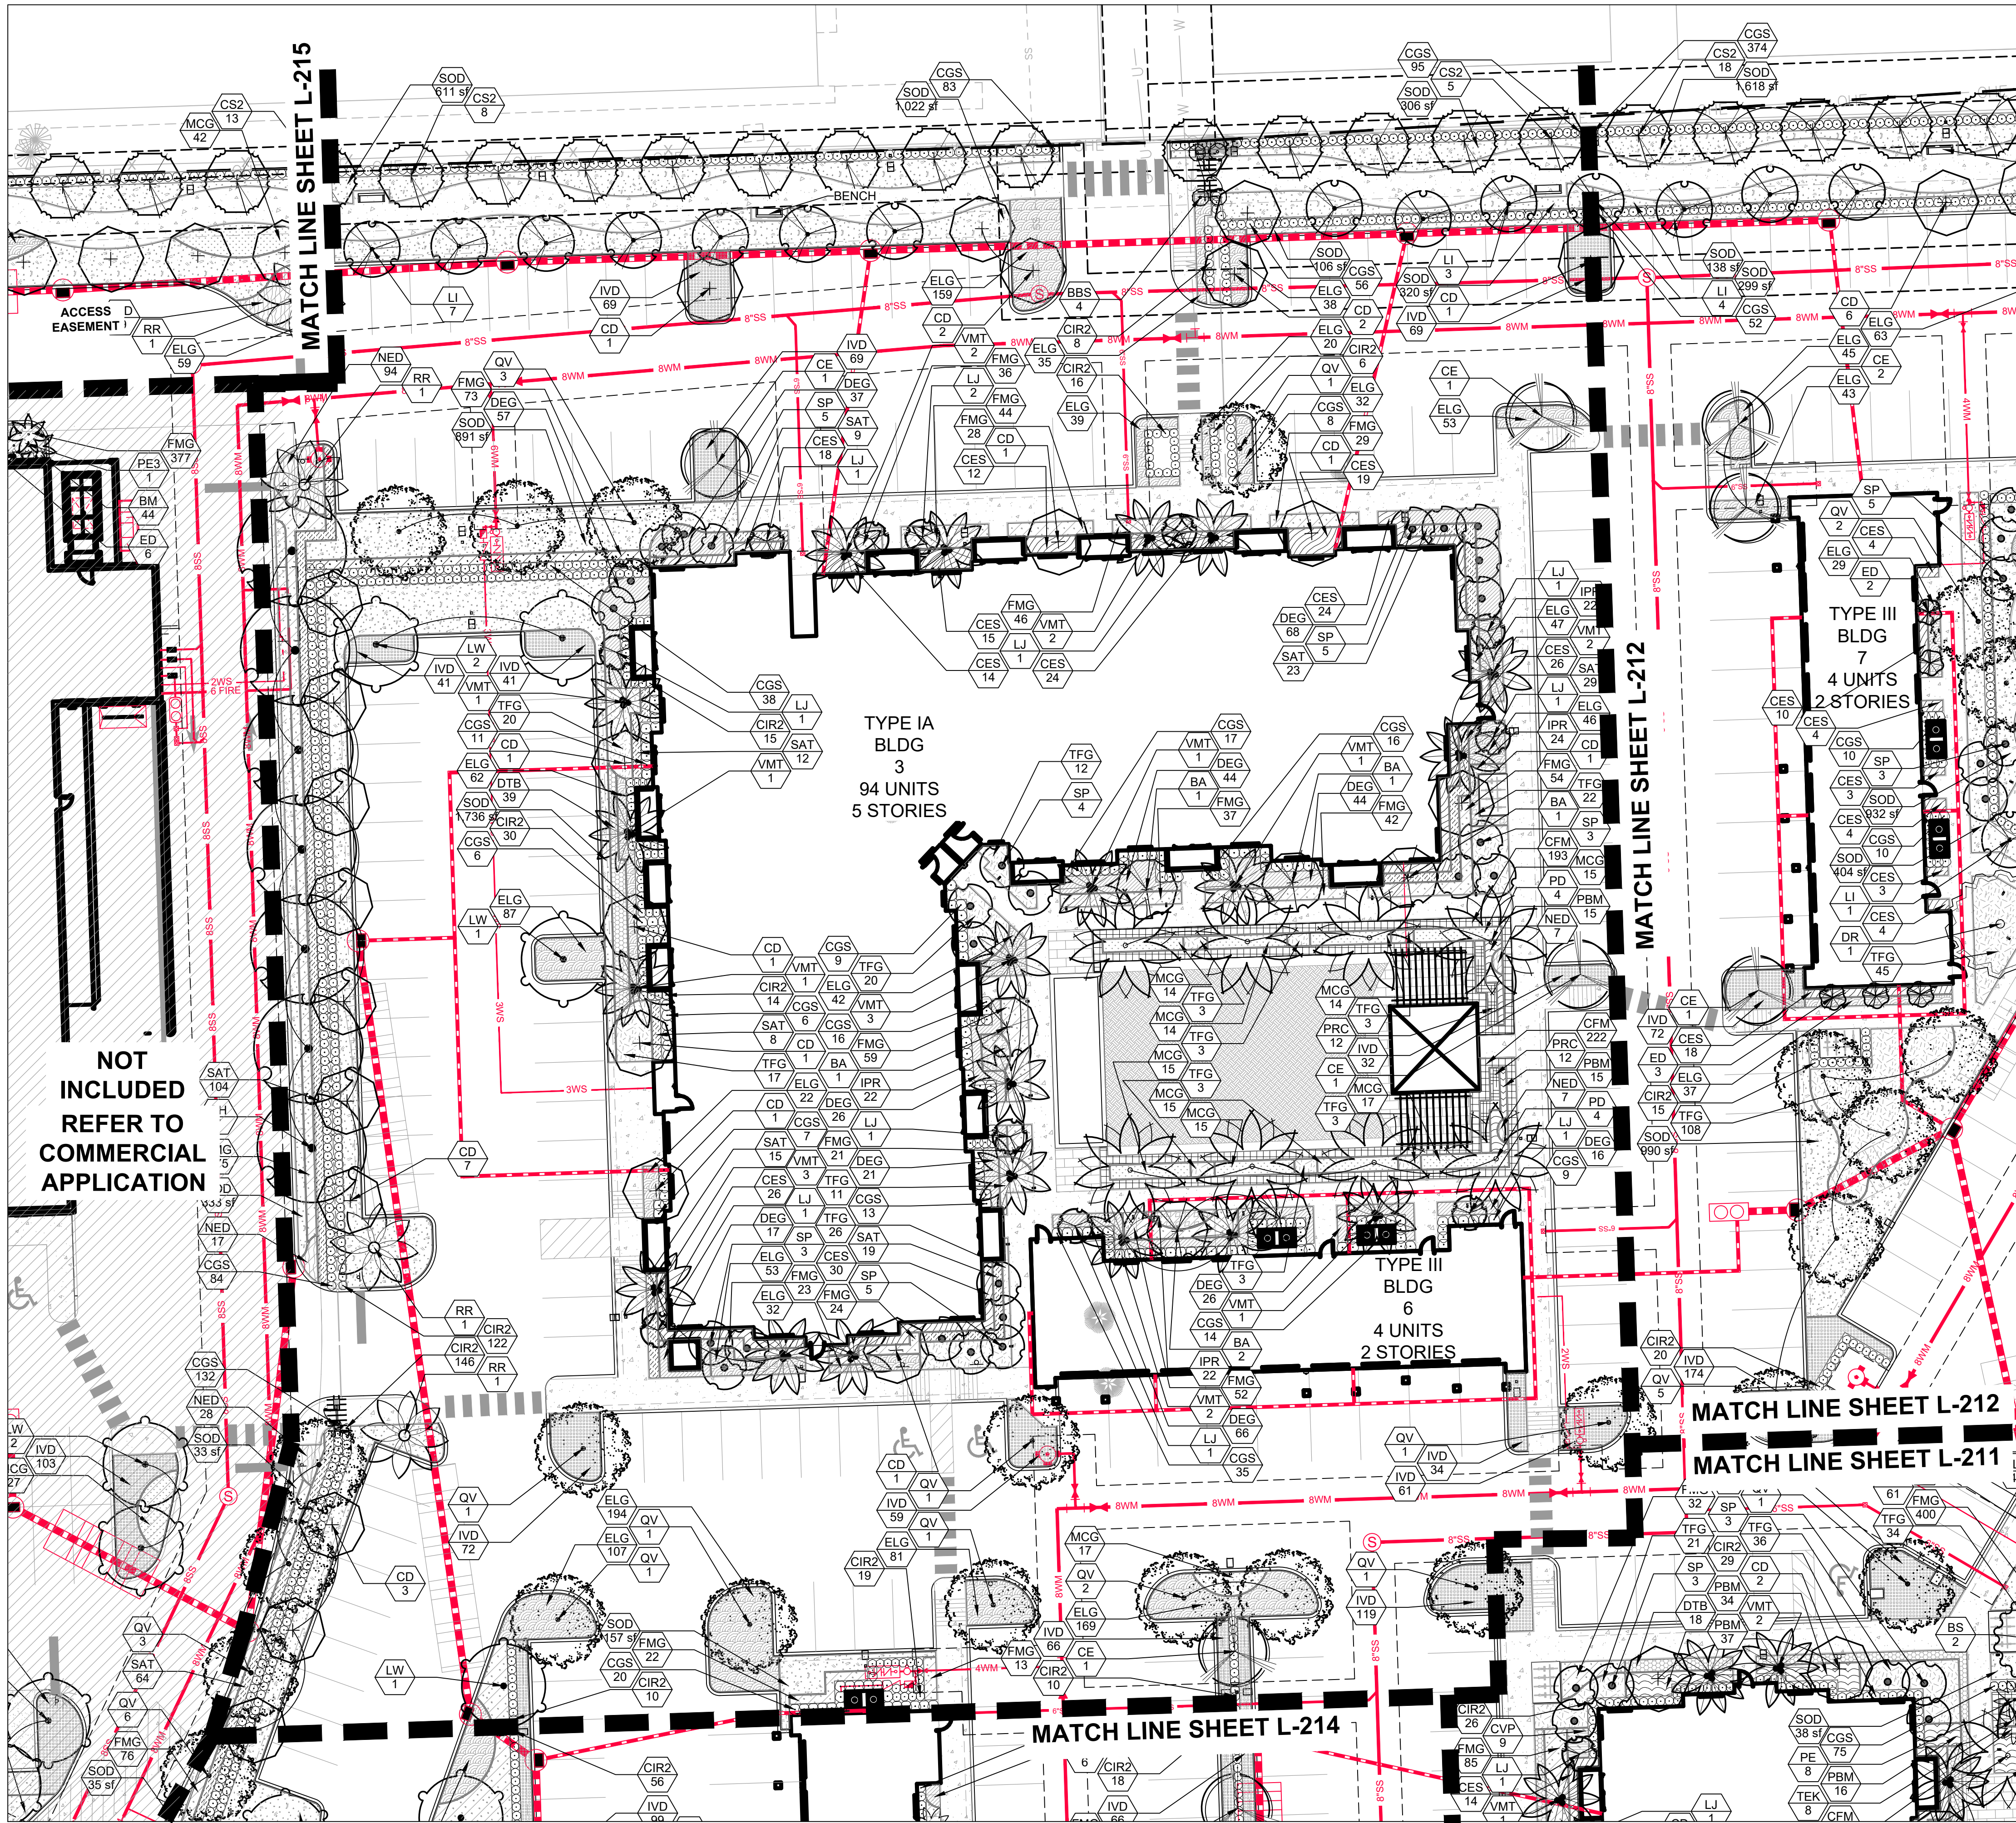

NOTES:

1. ALL SOD AND LANDSCAPE RECEIVE 100% COVERAGE FROM AN AUTOMATIC IRRIGATION SYSTEM USING AN APPROVED WATER SOURCE.
2. IRRIGATION SYSTEM SHALL ALSO BE EQUIPPED WITH RAIN SENSOR.
3. SEE SHEET L-210 - L-217 FOR PLANTING PLAN.
4. ALL PLANTED MATERIAL ADJACENT TO CURBING SHALL BE PLANTED 3' BACK OF SAID CURB.
5. A PRE-PLANTING MEETING SHALL BE SCHEDULED WITH THE CITY FORESTER OR LANDSCAPE INSPECTOR AND THE LANDSCAPE CONTRACTOR PRIOR TO ANY INSTALLATION ON THE SITE.
6. ALL SHADE AND MEDIUM TREES INSTALLED WITHIN 6' OF A PUBLIC INFRASTRUCTURE SHALL UTILIZE A ROOT BARRIER SYSTEM.
7. POLES AND TIES ARE TO BE REMOVED FROM TREE PRIOR TO PLANTING. TREES ARE TO BE ABLE TO STAND WITHOUT SUPPORT. THOSE THAT CANNOT STAND UPRIGHT ALONE WILL BE REJECTED.
8. THE USE OF CYPRESS MULCH IS DISCOURAGED AND ALL MULCH IS TO BE KEPT AT A MINIMUM OF 6" FROM BASE OF ALL PLANT MATERIAL.
9. THE USE OF SISAL STRAPPING/ROPE IS REQUIRED TO BE INCORPORATED AROUND THE TREE WHEN WELLINGTON TAPE IS USED TO STABILIZE THE PLANTING.

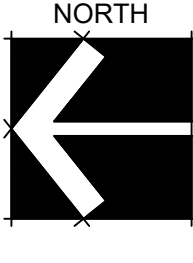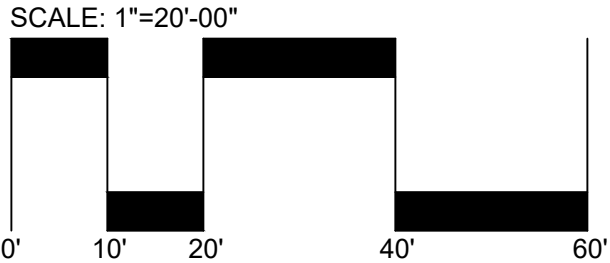

DRC SUBMITTAL SET

RAM OAKLAND PARK

RESIDENTIAL

670 E. Oakland Park Blvd., Oakland Park, FL

Sheet Description

LANDSCAPE
PLAN


Release Date
12-06-2019

Project Number
1912B

Drawing Number

L-213


Sheet 4 of 8

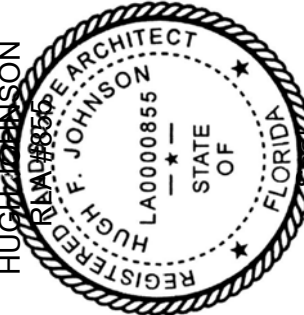

- 1 DRC Resubmittal Set
06-18-2020
- 2 DRC Resubmittal Set
06-18-2020



Revision Dates

AAL
Architectural Alliance Landscape
612 SW 4th Ave., Fort Lauderdale, FL 33315 LCC000237
TEL: 954-774-9838 EMAIL: h.johnson@aall.net

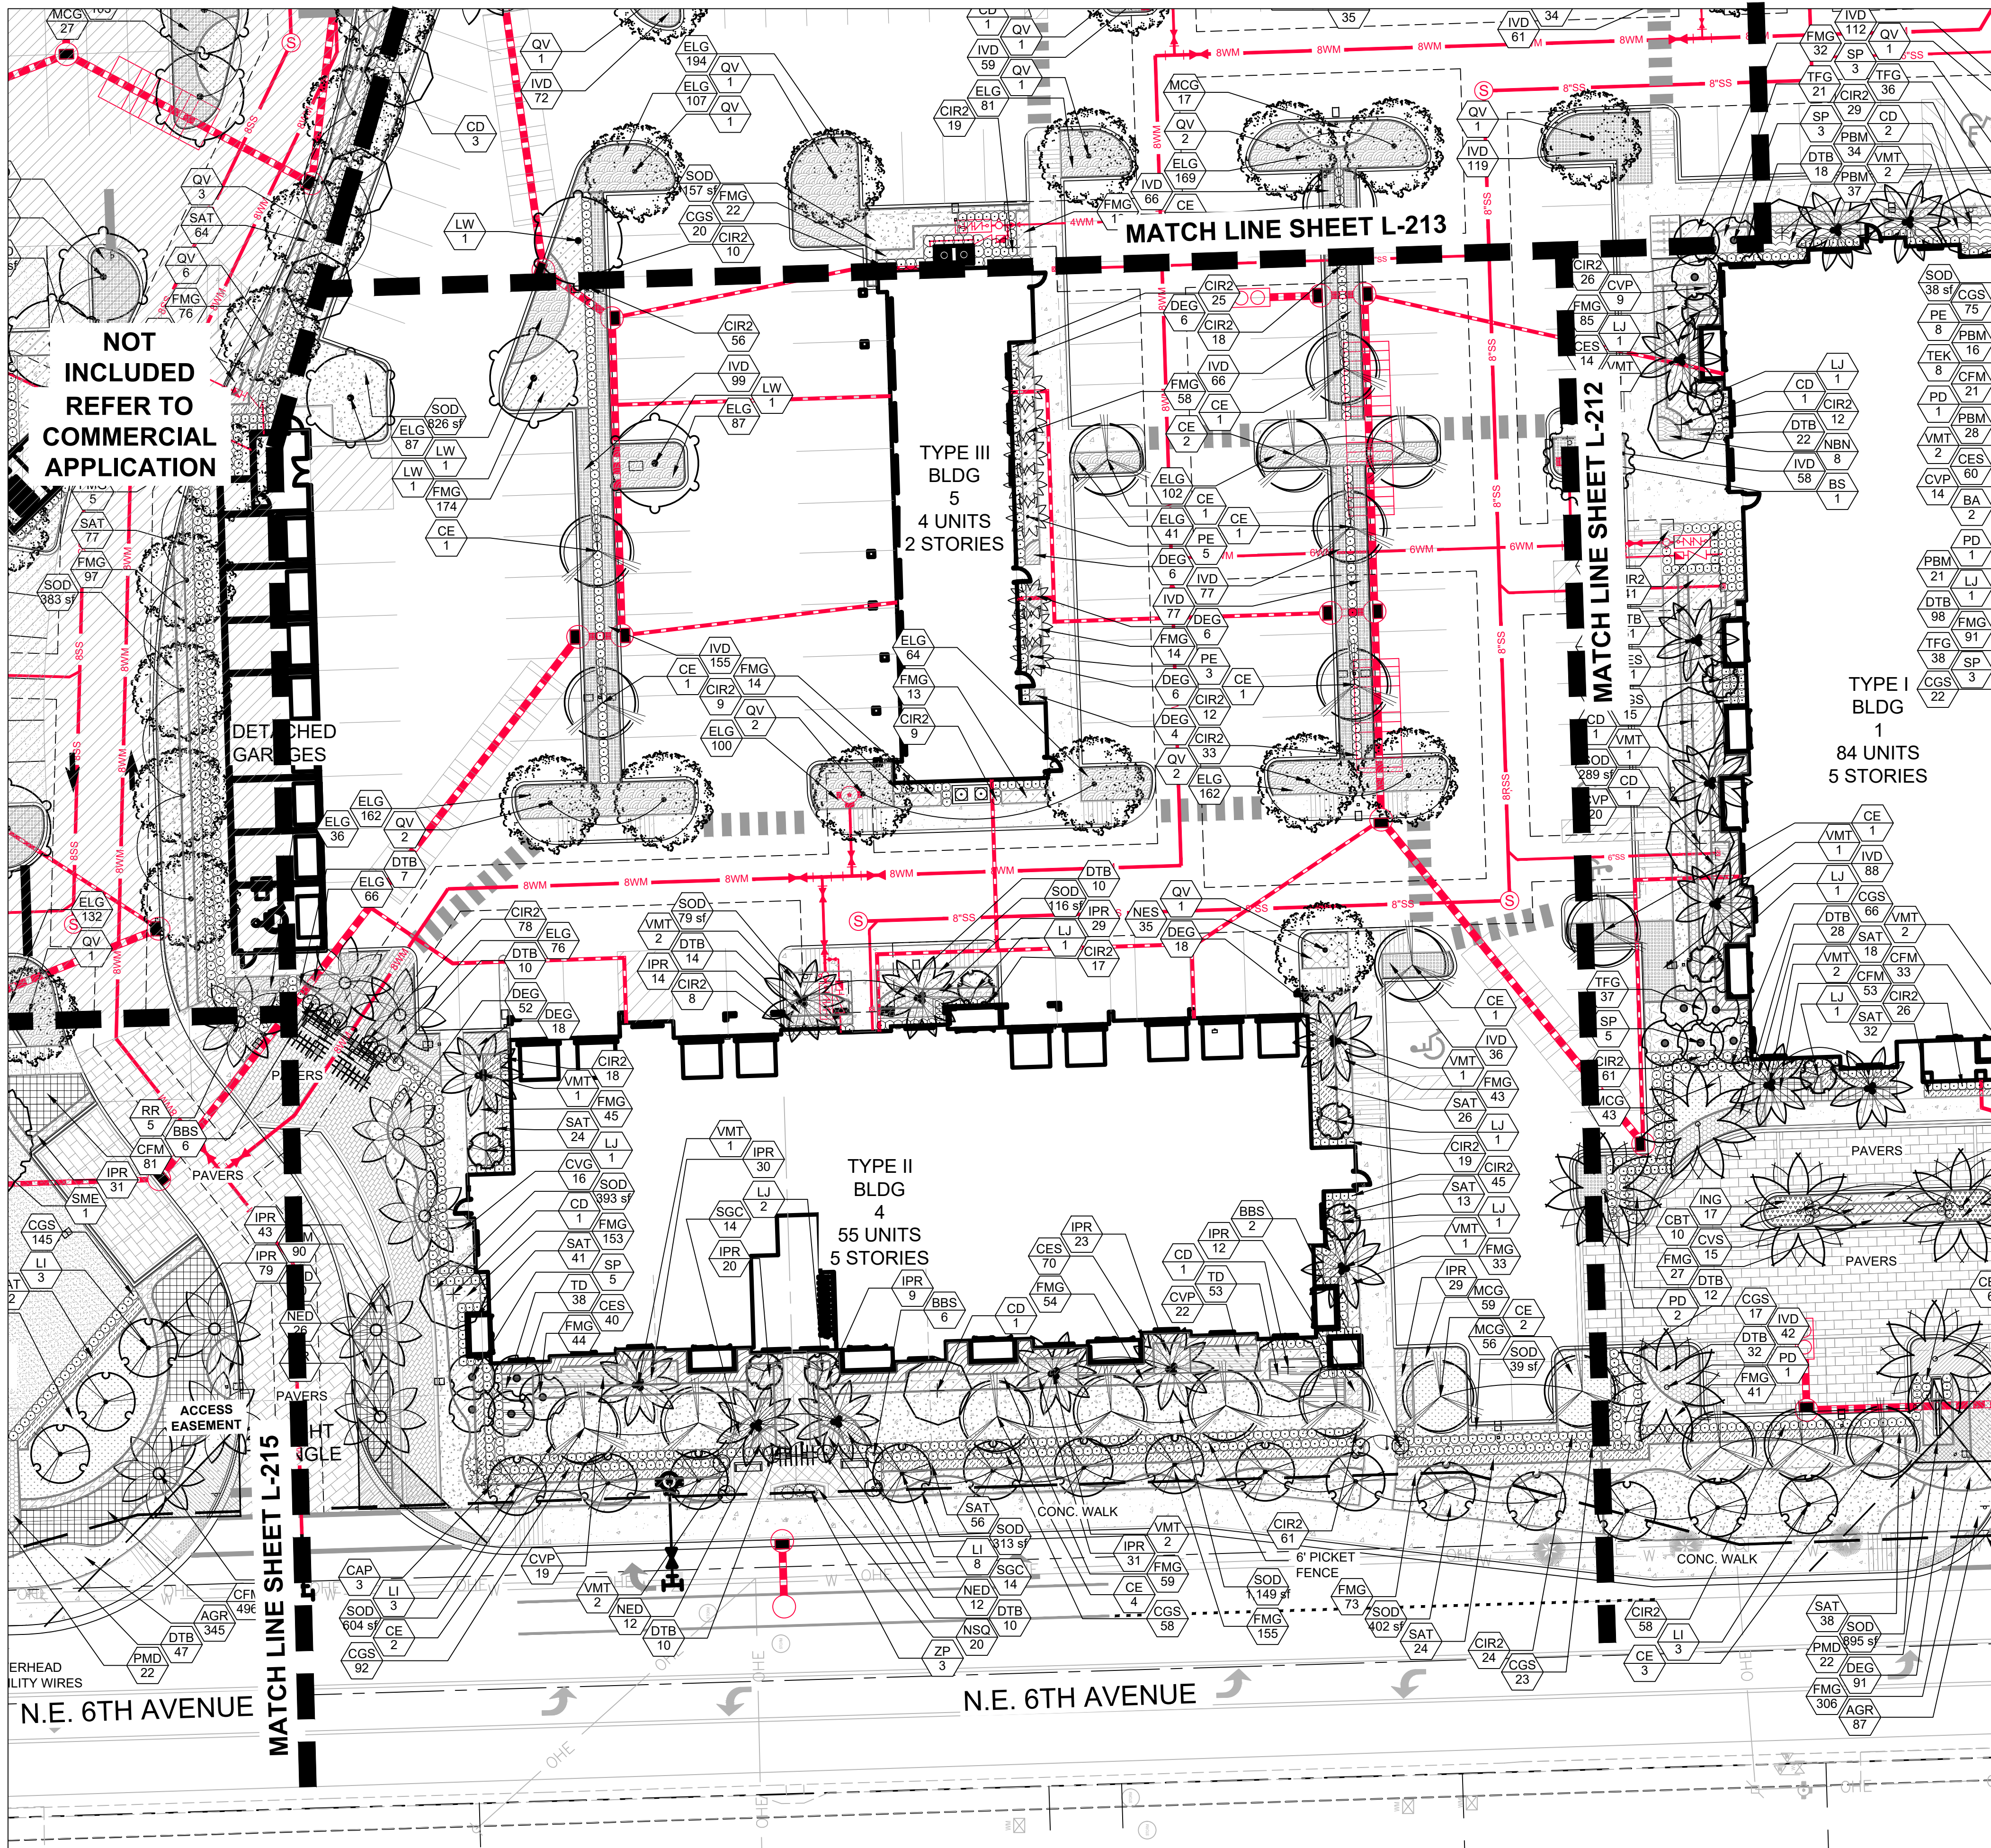

NOTES:

1. ALL SOD AND LANDSCAPE RECEIVE 100% COVERAGE FROM AN AUTOMATIC IRRIGATION SYSTEM USING AN APPROVED WATER SOURCE.
2. IRRIGATION SYSTEM SHALL ALSO BE EQUIPPED WITH RAIN SENSOR.
3. SEE SHEET L-210 - L-217 FOR PLANTING PLAN.
4. ALL PLANTED MATERIAL ADJACENT TO CURBING SHALL BE PLANTED 3' BACK OF SAID CURB.
5. A PRE-PLANTING MEETING SHALL BE SCHEDULED WITH THE CITY FORESTER OR LANDSCAPE INSPECTOR AND THE LANDSCAPE CONTRACTOR PRIOR TO ANY INSTALLATION ON THE SITE.
6. ALL SHADE AND MEDIUM TREES INSTALLED WITHIN 6' OF A PUBLIC INFRASTRUCTURE SHALL UTILIZE A ROOT BARRIER SYSTEM.
7. POLES AND TIES ARE TO BE REMOVED FROM TREE PRIOR TO PLANTING. TREES ARE TO BE ABLE TO STAND WITHOUT SUPPORT. THOSE THAT CANNOT STAND UPRIGHT ALONE WILL BE REJECTED.
8. THE USE OF CYPRESS MULCH IS DISCOURAGED AND ALL MULCH IS TO BE KEPT AT A MINIMUM OF 6" FROM BASE OF ALL PLANT MATERIAL.
9. THE USE OF SISAL STRAPPING/ROPE IS REQUIRED TO BE INCORPORATED AROUND THE TREE WHEN WELLINGTON TAPE IS USED TO STABILIZE THE PLANTING.

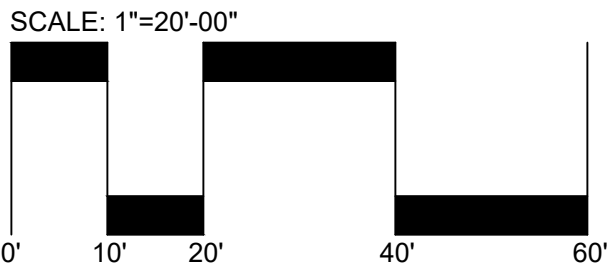

DRC SUBMITTAL SET

RAM OAKLAND PARK

RESIDENTIAL
670 E. Oakland Park Blvd., Oakland Park, FL

Sheet Description

LANDSCAPE
PLAN


Release Date
12-06-2019

Project Number
1912B

Drawing Number



L-214

Sheet 5 of 8

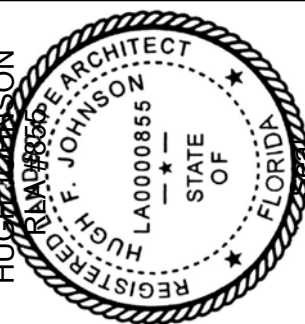



1 DRC Resubmittal Set 06-18-2020 F. JOHNSON L-2000866 06-18-2020	Revision Dates
2 DRC Resubmittal Set 06-18-2020	

AAL
Architectural Alliance Landscape
612 SW 4th Ave., Fort Lauderdale, FL 33315 LCC000237
TEL: 954-774-9836 EMAIL: h.johnson@aall.net

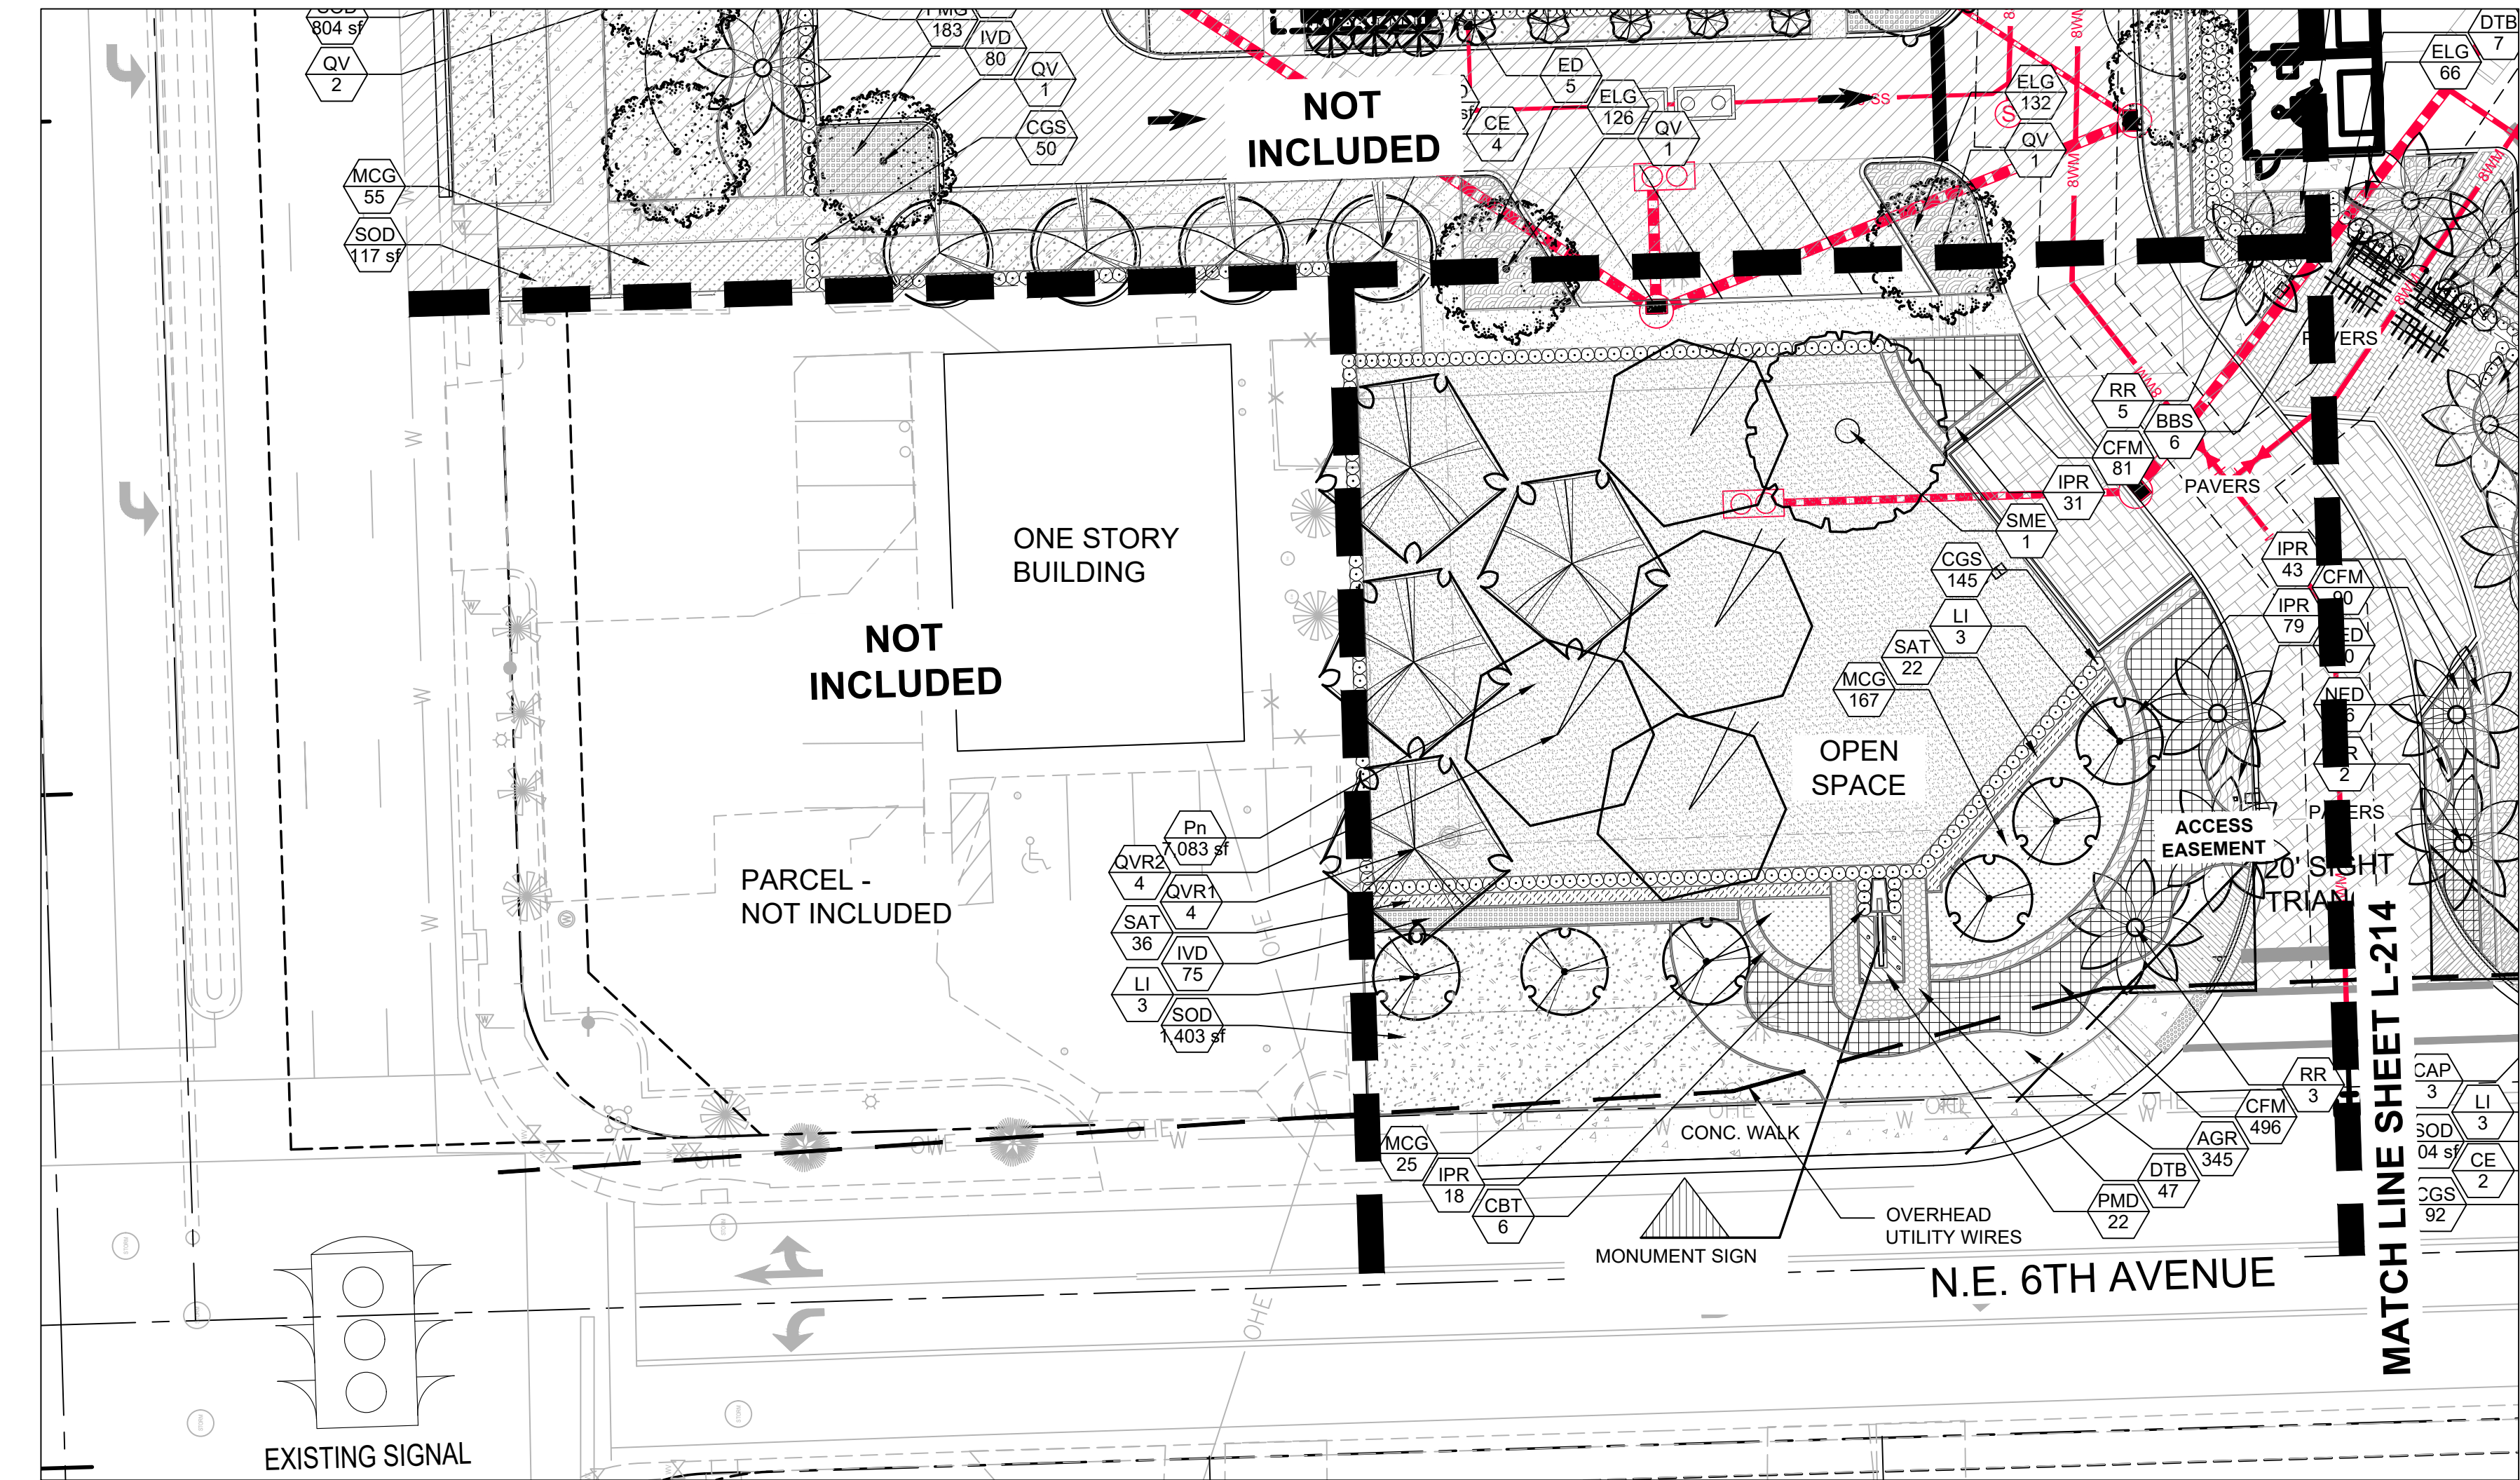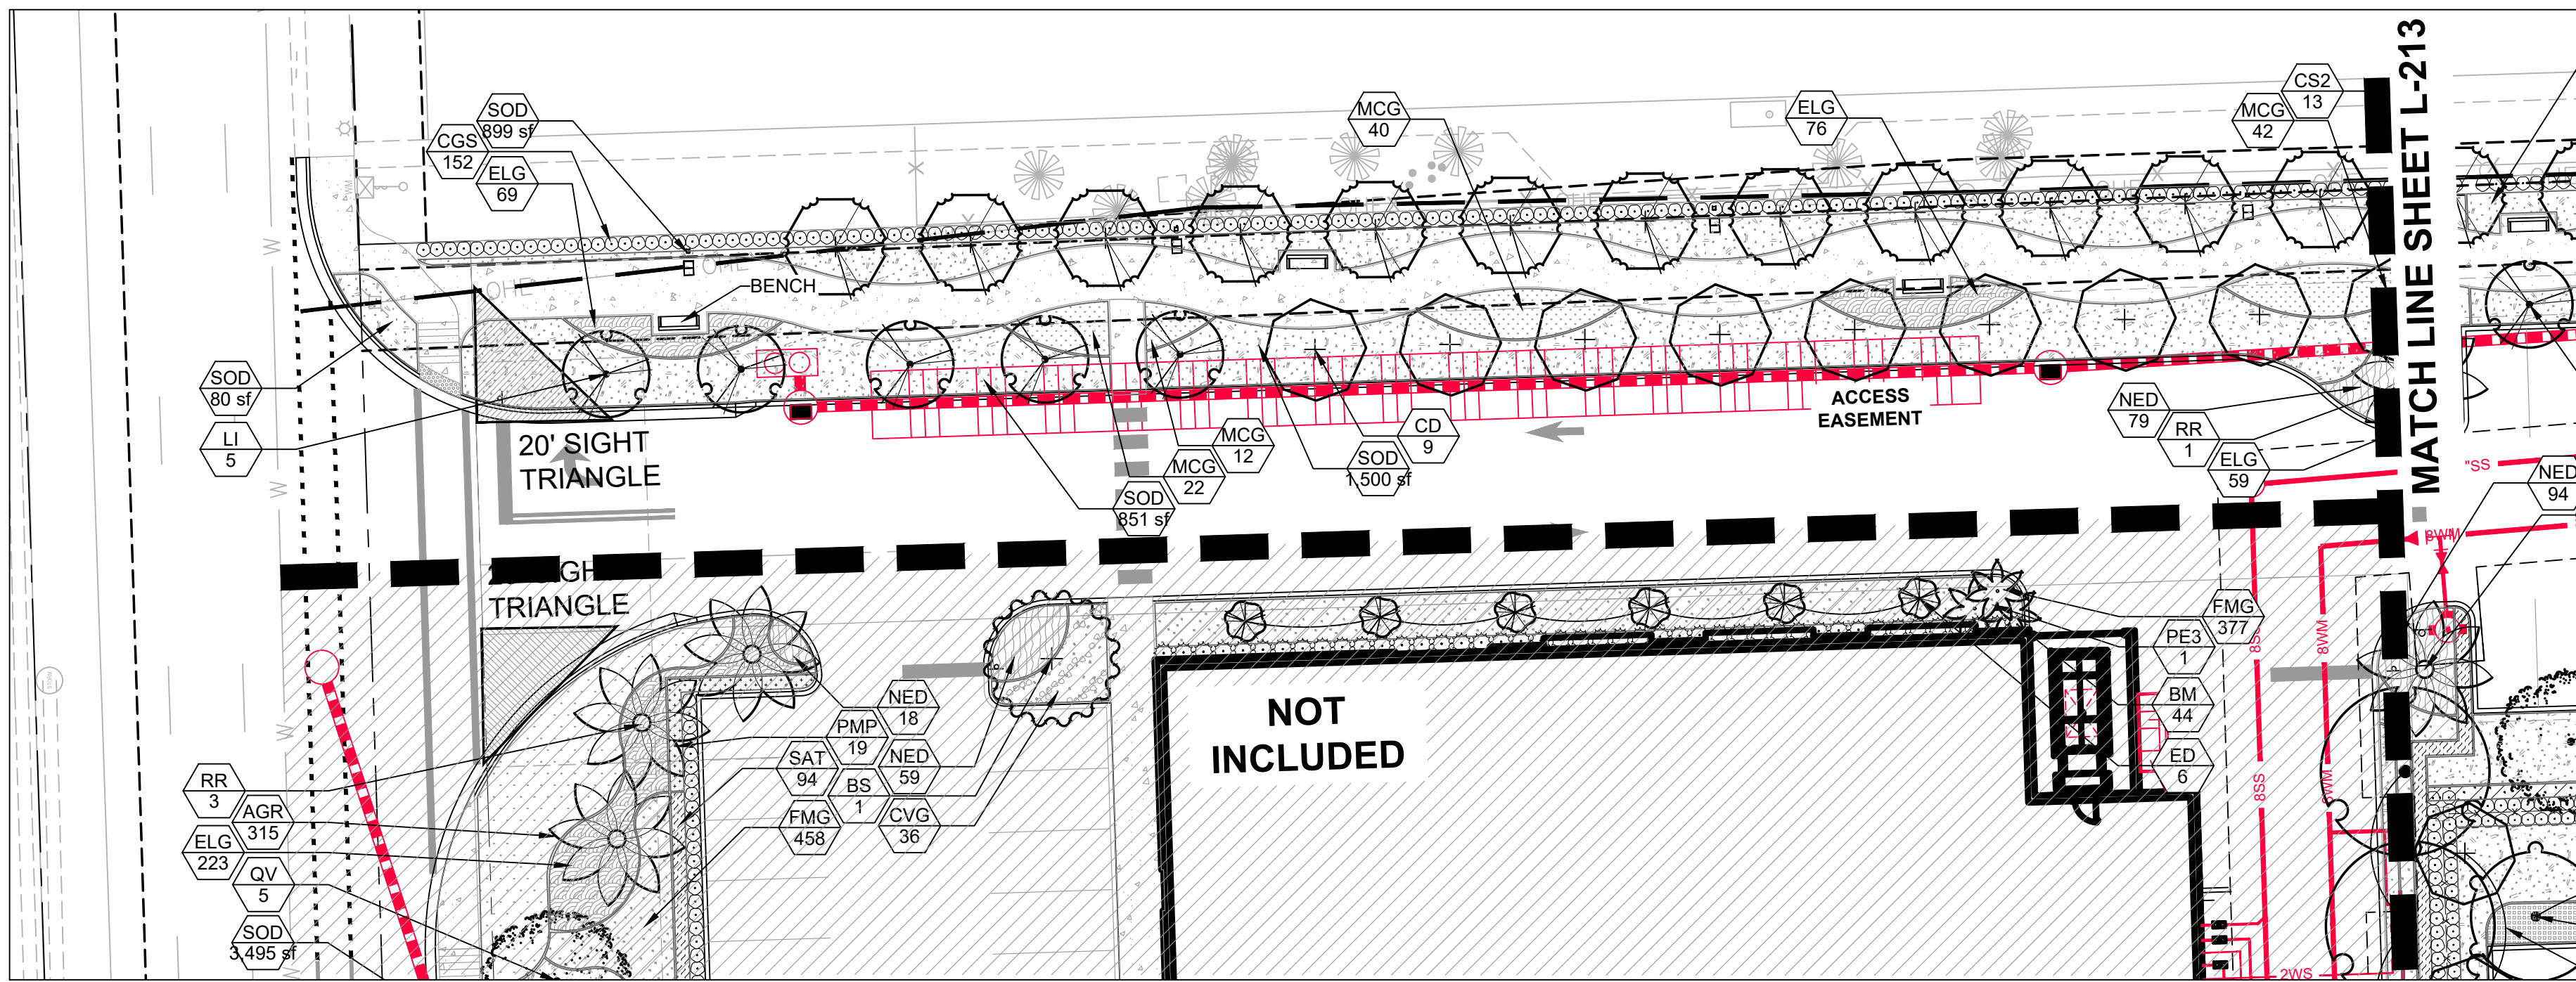

NOTES:


1. ALL SOD AND LANDSCAPE RECEIVE 100% COVERAGE FROM AN AUTOMATIC IRRIGATION SYSTEM USING AN APPROVED WATER SOURCE.
2. IRRIGATION SYSTEM SHALL ALSO BE EQUIPPED WITH RAIN SENSOR.
3. SEE SHEET L-210 - L-217 FOR PLANTING PLAN.
4. ALL PLANTED MATERIAL ADJACENT TO CURBING SHALL BE PLANTED 3' BACK OF SAID CURB.
5. A PRE-PLANTING MEETING SHALL BE SCHEDULED WITH THE CITY FORESTER OR LANDSCAPE INSPECTOR AND THE LANDSCAPE CONTRACTOR PRIOR TO ANY INSTALLATION ON THE SITE.
6. ALL SHADE AND MEDIUM TREES INSTALLED WITHIN 6' OF A PUBLIC INFRASTRUCTURE SHALL UTILIZE A ROOT BARRIER SYSTEM.
7. POLES AND TIES ARE TO BE REMOVED FROM TREE PRIOR TO PLANTING. TREES ARE TO BE ABLE TO STAND WITHOUT SUPPORT. THOSE THAT CANNOT STAND UPRIGHT ALONE WILL BE REJECTED.
8. THE USE OF CYPRESS MULCH IS DISCOURAGED AND ALL MULCH IS TO BE KEPT AT A MINIMUM OF 6" FROM BASE OF ALL PLANT MATERIAL.
9. THE USE OF SISAL STRAPPING/ROPE IS REQUIRED TO BE INCORPORATED AROUND THE TREE WHEN WELLINGTON TAPE IS USED TO STABILIZE THE PLANTING.

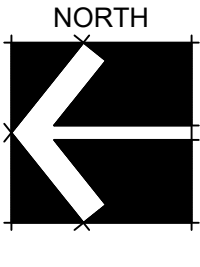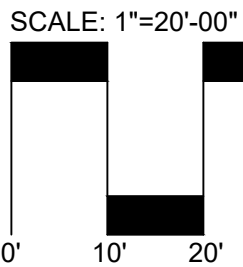

DRC SUBMITTAL SET
RAM OAKLAND PARK
RESIDENTIAL
670 E. Oakland Park Blvd., Oakland Park, FL

Sheet Description
LANDSCAPE PLAN
Release Date
12-06-2019
Project Number
1912B
Drawing Number
L-215
Sheet 6 of 8

1 DRC Resubmittal Set 06-18-2020
2 DRC Resubmittal Set 06-18-2020

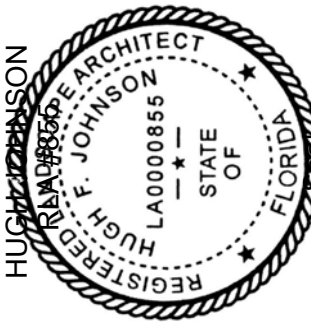

AAL
Architectural Alliance Landscape
612 SW 4th Ave., Fort Lauderdale, FL 33315 LCC000237
TEL: 954-764-9836 EMAIL: hjohnson@aall.net

Landscape Code Requirements

Zoning - B-1 Commercial

Site Area = 402,075 SF

Landscape and Streetscape Design Standards				
Description	Application	Calculation	Qty. Required	Qty. Provided
Sec. 1.A.13				
Street trees	1 tree/ 40 lf			
N.E. 6th Avenue		706 LF / 40 LF = 17.6	18	18
Sec. 1.C.1				
ROW Edge Perimeter	1 tree/ 40 LF			
N.E. 6th Avenue		706 LF / 40 LF = 17.6	18	18
Sec. 1.C.2.A				
Perimeter Abutting Prop.	1 tree/ 40 LF			
North Perimeter	Abutting Commercial			
South Perimeter	Abutting Middle River	679 LF / 40 LF = 16.9 = 17	17	28
North East Perimeter (Access Easement)		302 LF / 40 LF = 7.5 = 8	8	18
North East Perimeter (Commercial)		207 LF / 40 LF = 5.1 = 6	6	13
South East Perimeter (Residential)		480 LF / 40 LF = 12	12	27
Sec. 1.C.3.D				
1 Tree per 10 spaces				
Total # of Parking Spaces		403 Spaces / 10 = 40.3 min.	41	45+
includes tandem spaces outside of garages plus one tree for each parking island	15 SF for each space	403 x 15 SF = 6,045 SF Req.	6,045 SF	8,500 SF+
Native trees	50%	267 (50%) = 136 Native Trees	136	162 (61%)
162 / 267 = 0.606 = 61%				
Native shrubs	40%	25,145 (40%) = 10,058 Native Shrubs	10,058	10,251 (41%)
10,251 / 25,145 = 0.407 = 41%				

PLANT SCHEDULE RESIDENTIAL

TREES	QTY	BOTANICAL NAME	COMMON NAME	CONT	CAL	SIZE	NATIVE	DROUGHT		REMARKS
BS	14	BURSERA SIMARUBA	GUMBO LIMBO	FG/B&B	2.5"CAL	14'-16" HT X 5' SPR	YES	HIGH		
CD	58	COCOLOBA DIVERSIFOLIA	PIGEON PLUM	B&B FIELD GROWN	2.5"CAL	14' HT. X 5' SPR, 5' CT., FULL CANOPY	YES	HIGH		
CE	39	CONOCARPUS ERECTUS	BUTTONWOOD	B&B FIELD GROWN	2.5"CAL	14' HT. X 5' SPR, 5' CT., FULL CANOPY	YES	HIGH		
CS2	44	CONOCARPUS ERECTUS 'SERICEUS'	SILVER BUTTONWOOD	FIELD GROWN / B & B	2.5"CAL	12' HT X 6' SPR	YES	MEDIUM		
ED	5	ELAEOCARPUS DECIPENS	JAPANESE BLUEBERRY TREE	-	2"CAL	6' OA, FULL TO BASE	NO	HIGH		
LJ	30	LIGUSTRUM JAPONICUM	TREE LIGUSTRUM	B&B FIELD GROWN	2"CAL	8-10' OA HT., MULTI-TRUNK	NO	MEDIUM		
LW	8	LYSILOMA LATISLIQUUM	WILD TAMARIND	B&B FIELD GROWN	2.5"CAL	14' HT. X 5' SPR, 5' CT., FULL CANOPY	YES	HIGH		
QV	33	QUERCUS VIRGINIANA	LIVE OAK	B&B FIELD GROWN	2.5"CAL	14' HT. X 5' SPR, 5' CT., FULL CANOPY	YES	HIGH		
QVR1	4	QUERCUS VIRGINIANA	SOUTHERN LIVE OAK	EXISTING TO BE RELOCATED			YES	HIGH		FROM COMMERCIAL
QVR2	4	QUERCUS VIRGINIANA	SOUTHERN LIVE OAK	EXISTING TO BE RELOCATED			YES	HIGH		FROM RESIDENTIAL
SME	1	SWIETENIA MAHOGANY	MAHOGANY	EXISTING			YES	HIGH		
FLOWERING TREES	QTY	BOTANICAL NAME	COMMON NAME	CONT	CAL	SIZE	NATIVE	DROUGHT		REMARKS
BA	18	BULNESIA ARBOREA	VERAWOOD	B&B FIELD GROWN	2.5"CAL	14' HT. X 5' SPR, 5' CT., FULL CANOPY	NO	HIGH		
DR	1	DELONIX REGIA	ROYAL POINCIANA	B&B FIELD GROWN	2.5"CAL	14' HT. X 5' SPR, 5' CT., FULL CANOPY	NO	HIGH		
LI	56	LAGERSTROEMIA INDICA 'MUSKOGEE'	MUSKOGEE CRAPE MYRTLE 'STANDARD'	FG/B&B	2.5"CAL	14' HT. X 5' SPR, 5' CT., FULL CANOPY	NO	HIGH		
PALM TREES	QTY	BOTANICAL NAME	COMMON NAME	CONT	CAL	SIZE	NATIVE	DROUGHT		REMARKS
PD	23	PHOENIX DACTYLIFERA 'MEDJOOOL'	MEDJOOOL DATE PALM	B&B FIELD GROWN	10"-12" CAL	14' CT MIN., 22' OA. HT.	NO	HIGH		
PE	42	PTYCHOSPERMA ELEGANS	SOLITAIRE PALM	B&B FIELD GROWN	3"CAL	12' O.A.	NO	HIGH		
RR	24	ROYSTONEA REGIA	ROYAL PALM	FG/B&B		20' OA., MATCHE HEIGHTS	YES	MEDIUM		
SP	114	SABAL PALMETTO	CABBAGE PALMETTO	B&B FIELD GROWN	10"-12" CAL	14'-20' OA, VARY HEIGHTS	YES	HIGH		
VMT	56	VEITCHIA MONTGOMERYANA	MONTGOMERY PALM	FG/B&B	3"CAL	16-18' OA, TRIPLE TRUNK	NO	HIGH		
SHRUBS	QTY	BOTANICAL NAME	COMMON NAME	CONT	CAL	SIZE	NATIVE	DROUGHT		REMARKS
CIR2	2,116	CHRYSOBALANUS ICACO 'REDTIP'	RED TIP COCOPLUM	3 GAL.,		24"HT X 24"SPR	YES	MEDIUM		
CGS	2,016	CLUSIA GUTTIFERA	SMALL-LEAF CLUSIA	-		36" HT. X 30" SPR.	YES	HIGH		
ZP	3	ZAMIA PUMILA	COONTIE	5 GAL		24" HT. X 24" SPD.	YES	HIGH		
ACCENT SHRUB	QTY	BOTANICAL NAME	COMMON NAME	CONT	CAL	SIZE	NATIVE	DROUGHT		REMARKS
BBS	28	BOUGAINVILLEA X 'BARBARA KARST'	BARBARA KARST BOUGAINVILLEA	15 GAL		5-6' OA, STANDARD	NO	HIGH		
CBT	22	CORDYLINE FRUTICOSA 'BOLERO'	BOLERO TI PLANT	3 GAL		24-28" OA	NO	MEDIUM		
CAP	3	CRINUM AUGUSTUM 'QUEEN EMMA'	'QUEEN EMMA' CRINUM	7 GAL.		36" HT. X 30" SPR.	NO	HIGH		
SHRUB AREAS	QTY	BOTANICAL NAME	COMMON NAME	CONT	CAL	SIZE	NATIVE	DROUGHT	SPACING	REMARKS
CFM	1,415	CARMONA MICROPHYLLA	FUKIEN TEA	-		14" HT X 16" SPR	NO	MEDIUM	18" o.c.	
CIR	20	CHRYSOBALANUS ICACO 'REDTIP'	RED TIP COCOPLUM	3 GAL.,		24"HT X 24"SPR	YES	MEDIUM	24" o.c.	
CVS	15	CODIAEUM VARIEGATUM 'SLOPPY PAINTER'	SLOPPY PAINTER CROTON	3 GAL.,		24"HT X 24"SPR	NO	HIGH	24" o.c.	
CES	649	CONOCARPUS ERECTUS SERICEUS	SILVER BUTTON WOOD	3 GAL		24"HT X 24"SPR	YES	HIGH	24" o.c.	
ING	34	IXORA COCCINEA 'NORA GRANT'	NORA GRANT IXORA	3 GAL		24"HT X 24"SPR	NO	HIGH	24" o.c.	
PBM	554	PHILODENDRON X 'BURL MARX'	PHILODENDRON	-		16" HT X 16" SPR	NO	MEDIUM	20" o.c.	
PRC	125	PHILODENDRON X 'ROJO CONGO'	ROJO CONGO PHILODENDRON	3 GAL.,		24"HT X 24"SPR	NO	MEDIUM	24" o.c.	
SGC	28	SCHIEFFLERA ARBORICOLA 'GOLD CAPELLA'	GOLD CAPELLA ARBORICOLA	3 GAL.,		24"HT X 24"SPR	NO	HIGH	24" o.c.	
SAT	837	SCHIEFFLERA ARBORICOLA 'TRINETTE'	SCHIEFFLERA	3 GAL.,		24"HT X 24"SPR	NO	HIGH	24" o.c.	
TEK	28	THUNBERGIA ERRECTA	KING'S MANTLE	3 GAL.,		24"HT X 24"SPR	NO	MEDIUM	24" o.c.	
TD	201	TRIPSACUM DACTYLOIDES NANA	DWARF FAKAHATCHEE GRASS	3 GAL		16" HT X 16" SPR	YES	MODERATE	18" o.c.	
GROUND COVERS	QTY	BOTANICAL NAME	COMMON NAME	CONT	CAL	SIZE	NATIVE	DROUGHT	SPACING	REMARKS
AGR	847	ARACHIS GLABRATA	PERENNIAL PEANUT 'LARGE LEAF'	1 GAL		6"HT X 12"SPR @	NO	HIGH	18" o.c.	
CVG	16	CODIAEUM VARIEGATUM 'GOLDEN DUST'	GOLD DUST CROTON	3 GAL.,		16" HT X 16" SPR	NO	HIGH	24" o.c.	
CVP	148	CODIAEUM VARIEGATUM 'PETRA'	BRAVO CROTON	3 GAL.,		16" HT X 16" SPR	NO	HIGH	24" o.c.	
DTB	463	DIANELLA TASMANICA	BLUEBERRY FLAX LILY	3 GAL.,		18" HT X 18" SPR	NO	MEDIUM	24" o.c.	
DEG	722	DURANTA ERECTA 'GOLD MOUND'	GOLD MOUND DURANTA	3 GAL.,		14" HT X 16" SPR	YES	HIGH	20" o.c.	
ELG	3,429	ERNODEA LITTORALIS	GOLDEN CREEPER	-		12" HT. X 12" SPR.	YES	HIGH	16" o.c.	
FMG	4,597	FICUS MICROCARPA 'GREEN ISLAND'	GREEN ISLAND FICUS	-		14" HT X 16" SPR	NO	HIGH	18" o.c.	
IVD	2,339	ILEX VOMITORIA 'STOKES DWARF'	DWARF YALUPON HOLLY	3 GAL.,		12"HT X 12"SPR	YES	HIGH	18" o.c.	
IPR	725	IXORA X 'PETITE TAIWAN RED'	DWARF RED TAIWAN IXORA	3 GAL.,		10" HT. X 10" SPR.	NO	MEDIUM	18" o.c.	
JVW	106	JASMINUM VOLUBILE	WAX JASMINE	3 GAL.,		20" HT X 20" SPR	NO	MEDIUM	24" o.c.	
NBN	220	NEOREGELIA X 'BOSSA NOVA'	GREEN & WHITE BROMELIAD	1 GAL			NO	HIGH	20" o.c.	
NED	287	NEOREGELIA X 'DONGER'	RED DWARF BROMELIAD	1 GAL			NO	HIGH	15" o.c.	
NFB	98	NEOREGELIA X 'FIREBALL'	FIREBALL BROMELIAD	1 GAL.		6"X6"	NO	HIGH	12" o.c.	
NSQ	69	NEOREGELIA X 'TEQUILA'	TEQUILA BROMELIAD	1 GAL.,		12" HT. X 12" SPR.	NO	HIGH	16" o.c.	
NES	551	NEPHROLEPIS EXALTATA	BOSTON FERN	12" HT X 12" SPR			YES	HIGH	18" o.c.	
PMD	44	PODOCARPUS MACROPHYLLUS 'DWARF PRINGLES'	DWARF PODOCARPUS	3 GAL.,		14" HT X 12" SPR	NO	HIGH	18" o.c.	
SOD/SEED	QTY	BOTANICAL NAME	COMMON NAME	CONT	CAL	SIZE	NATIVE	DROUGHT	SPACING	REMARKS
Ph	7,083 SF	PASPALUM NOTATUM 'ARGENTINE'	BAHIA GRASS	SOD			YES	HIGH		
SOD	23,939 SF	STENOTAPHRUM SECUNDATUM 'FLORITAM'	'FLORITAM' ST. AUGUSTINE SOD	SOD						
TALL GROUND COVERS	QTY	BOTANICAL NAME	COMMON NAME	CONT	CAL	SIZE	NATIVE	DROUGHT	SPACING	REMARKS
MCG	882	MUHLENBERGIA CAPILLARIS	PINK MUHLY GRASS	3 GAL.,		18"HT X 18"SPR @	YES	HIGH	24" o.c.	
TFG	809	TRIPSACUM FLORIDANA	FLORIDA GAMMA GRASS	3 GAL.,		24" HT. X 24" SPR.	YES	HIGH	30" o.c.	

NOTES:

- ALL SOD AND LANDSCAPE RECEIVE 100% COVERAGE FROM AN AUTOMATIC IRRIGATION SYSTEM USING AN APPROVED WATER SOURCE.
- IRRIGATION SYSTEM SHALL ALSO BE EQUIPPED WITH RAIN SENSOR.
- SEE SHEET L-210 - L-217 FOR PLANTING PLAN.
- ALL PLANTED MATERIAL ADJACENT TO CURBING SHALL BE PLANTED 3' BACK OF SAID CURB.
- A PRE-PLANTING MEETING SHALL BE SCHEDULED WITH THE CITY FORESTER OR LANDSCAPE INSPECTOR AND THE LANDSCAPE CONTRACTOR PRIOR TO ANY INSTALLATION ON THE SITE.
- ALL SHADE AND MEDIUM TREES INSTALLED WITHIN 6' OF A PUBLIC INFRASTRUCTURE SHALL UTILIZE A ROOT BARRIER SYSTEM.
- POLES AND TIES ARE TO BE REMOVED FROM TREE PRIOR TO PLANTING. TREES ARE TO BE ABLE TO STAND WITHOUT SUPPORT. THOSE THAT CANNOT STAND UPRIGHT ALONE WILL BE REJECTED.
- THE USE OF CYPRESS MULCH IS DISCOURAGED AND ALL MULCH IS TO BE KEPT AT A MINIMUM OF 6" FROM BASE OF ALL PLANT MATERIAL.
- THE USE OF SISAL STRAPPING/ROPE IS REQUIRED TO BE INCORPORATED AROUND THE TREE WHEN WELLINGTON TAPE IS USED TO STABILIZE THE PLANTING.

RAM OAKLAND PARK
RESIDENTIAL
670 E. Oakland Park Blvd., Oakland Park, FL

DRC SUBMITTAL SET

Sheet Description
LANDSCAPE
PLAN

Release Date
12-06-2019

Project Number
1912B

Drawing Number

L-216

Sheet 7 of 8



1 DRC Resubmittal Set
06-13-2020
2 DRC Resubmittal Set
06-18-2020

Revision Dates

